

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC GP DIST 00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
H		ECO-14-009220	19SEP2014	WZ	WK

NOTES:

1. CABLE ASSEMBLIES MUST MEET OR EXCEED THE CURRENT IEEE 1284 STANDARDS.

2. LABEL INFORMATION FOR DASH 1, 3, 4, 5 & 6:

COUNTRY OF ORIGIN
TE P/N
WWYY
IEEE STD
1284-1994


3. LABEL INFORMATION FOR DASH 2 ONLY:

162K23031	XEROX P/N
REV.E	XEROX REV.*
AMP / 158394-2	MFG / P/N
WK/YR	
COUNTRY OF ORIGIN	

4. ASSEMBLE PER APPLICATION SPECS 114-5124 & 114-5136.


5. TEST REQUIREMENT:
CONTINUITY RESISTANCE: SEE TABLE.
INSULATION RESISTANCE: 50 M ohm MIN.
HI-POT TEST: DC 300V/0.01 Sec MIN.

6. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE ENVIRONMENTAL STANDARD TEC-138-702.

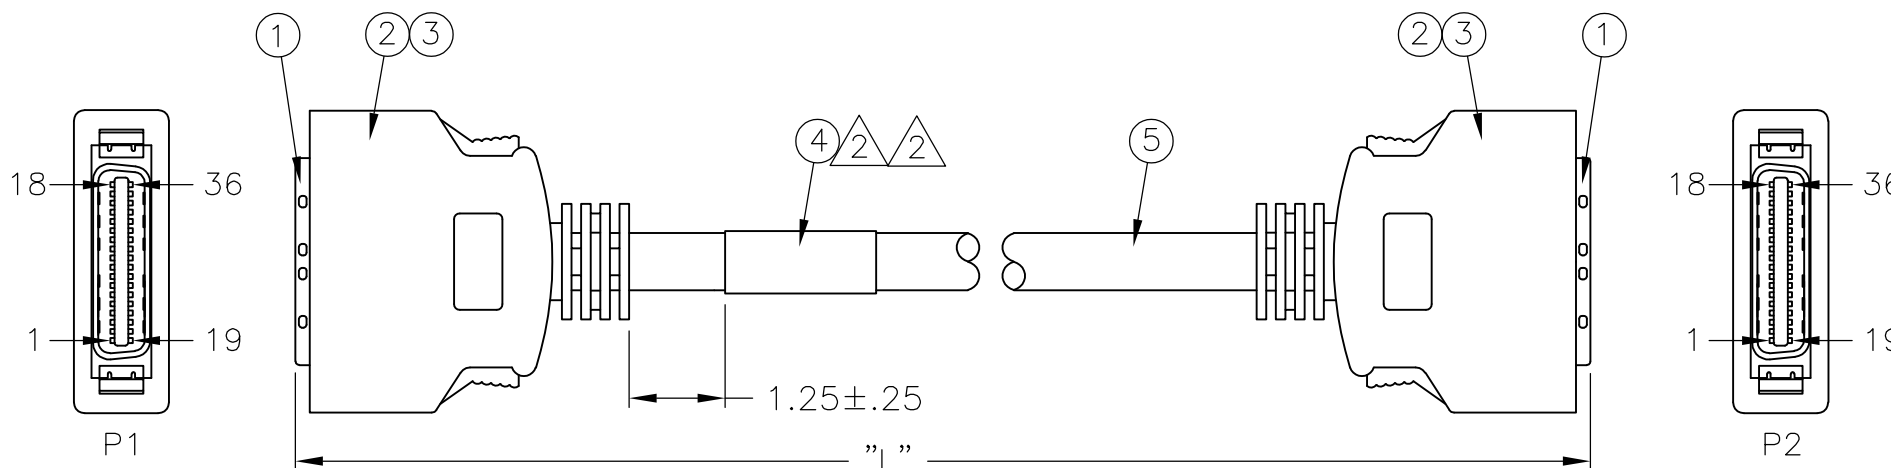

158394-6	393.72 ^{+6.00} _{-0.00}	10 OHM MAX
158394-5	236.28 ^{+4.00} _{-0.00}	5 OHM MAX
158394-4	118.11 ^{+3.00} _{-0.00}	2 OHM MAX
158394-3	78.74 ^{+3.00} _{-0.00}	1.5 OHM MAX
158394-2	59.04 ^{+3.00} _{-0.00}	1 OHM MAX
158394-1	19.68 ^{+1.00} _{-0.00}	1 OHM MAX
TE P/N	"L" LENGTH	CONTINUITY RESISTANCE

PIN ASSIGNMENT :

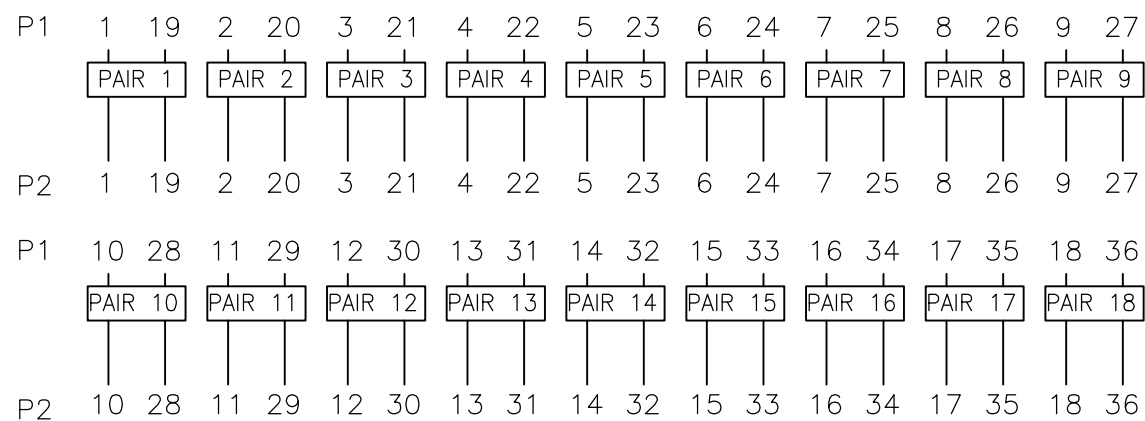

Q'TY	U/M	DESCRIPTION	ITEM
AR	MR	UL2464 28AWG*18P+DRAIN+AL/MYLAR+BRAID, (WIRE INSULATION OD: 0.5~0.7MM), COLOR: BEIGE(BG01).	5
1	PC	LABEL, SIZE: 25.0*76.0MM, WHITE: 25.0*19.0MM.	4
AR	MR	ADHESIVE COPPER FOIL, W: 5.0MM.	3
2	PC	SHIELD CASE KIT, FOR CHAMP 1.27MM PITCH 36POS PLUG.	2
2	PC	CHAMP 1.27MM PITCH, 36POS, CONTACT: GOLD 30U" PLATED, FOR WIRE: 28AWG, FOR WIRE INSULATION OD: 0.5~0.7MM, INSULATION COLOR: BLACK.	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.EISENTRAUT 11-13-96	TE Connectivity	
DIMENSIONS: INCHES		CHK J.CORRELL 11-21-96		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.CORRELL 11-21-96	NAME	
0 PLC ± -		PRODUCT SPEC	CABLE ASSY, IEEE 1284, BEIGE, C-C	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT -	SIZE A3	CAGE CODE 00779
3 PLC ± -		MATERIAL -	DRAWING NO	RESTRICTED TO -
4 PLC ± -			C-158394	SCALE N.T.S
ANGLES ± -		CUSTOMER DRAWING		
FINISH -		REV H		