
**Mounting Option** 

.344 (8.74) Offset Card Guides

## **Contact Detail**

Extender Board Bend (Code 520 Contacts)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

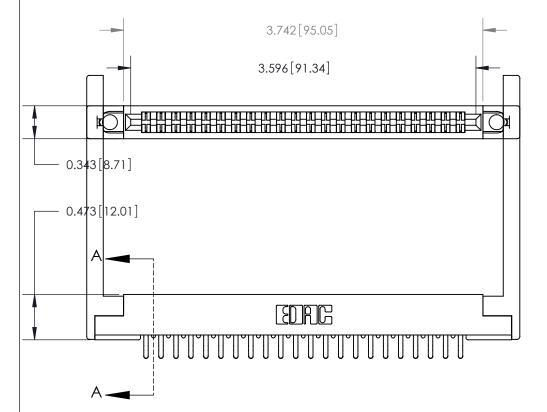


THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

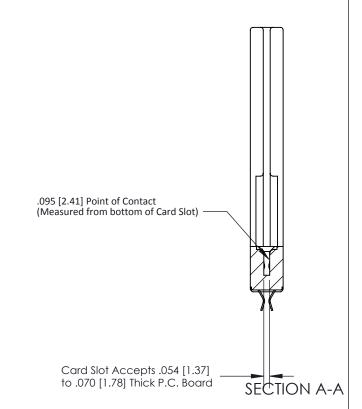

## **See Accompanying Pages for:**

- Contact Bend Details
- Mounting Options
- Features and Specifications

807 Series High Temp Card Edge Connector Part Number: 807-044-556-268



TORONTO, ONTARIO CANADA

CANADA OR USED AS THE BASIS

YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PERMI

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC.AND
SHALL NOT BE REPRODUCED,OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

| ACAD REFERENCE NO. 807 ENG MASTER |                  |  |  |  |
|-----------------------------------|------------------|--|--|--|
| DRAWN: J.LEE                      | DATE: AUG. 11/09 |  |  |  |
| CHECKED:                          | DATE:            |  |  |  |
| SCALE: NTS                        | SHEET 1 OF 4     |  |  |  |
| DRAWING NUMBER                    | ISSUE            |  |  |  |

807 Assembly





ISSUE NUMBE

ORIGINAL



## **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 807 Series High Temp Card Edge Connector<br>Features and Specifications |                                  | ACAD REFERENCE NO. 807 ENG MASTER |             |          |          |
|---|----------------------------------|-----------------------------------|-------------|----------|----------|
|   |                                  | DRAWN:                            | J.LEE       | DATE: AU | G. 11/09 |
|   |                                  | CHECKED:                          |             | DATE:    |          |
| EDAC INC  | ARE THE PROPERTY OF EDAG ING AND | SCALE:                            | NTS         | SHEET .  | 4 OF 4   |
| TORONTO, ONTARIO  |                                  | DRAWING                           | NUMBER      |          | ISSUE    |
| YOUR CONNECTION TO QUALITY & SERVICE                                    | MANUFACTURE OR SALE OF APPARATUS | 8                                 | 07 Assembly |          | 1        |