
т	۵	п	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 13.3 g ± 10%

8D 0

G

11

J

01

S


F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M15x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

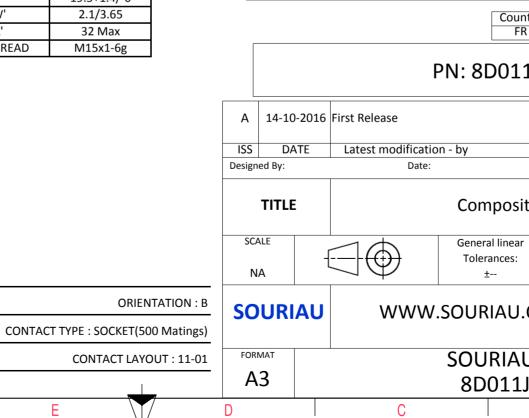

any non-conformity or damage which does not comply with er of the Parties or by a third party adation, technical notice.)
antry Jurisdiction & Control List
any non-conformity or damage s which does not comply with er of the Parties or by a third party indation, technical notice.)
any non-conformity or damage s which does not comply with er of the Parties or by a third party indation, technical notice.)
s which does not comply with er of the Parties or by a third party indation, technical notice.) Jurisdiction & Control List
1J01SB
CUSTOMER DRAWING
site Receptacle 8D series
859
Image: second
859 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission VUDRG N° SHEET
859 1 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission

r	<u>т</u>	۵	гт —	m		0	
		Contact Layout				Panel Cut	out
4		01			1	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc	1#12 11-01 X Y			₩ ₩	ØT.	D1
ω	A	0 0				Dim ØA ØAA R1 ØT	
	_					SOURIAU shall not be liable for a due to a use of the Products of the Specifications issued by either (professional recommend	whi of
N						Cour FF PN: 8D01	2
					A 14-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					SCALE NA	Composi General linear Tolerances: ±	
		-	_		FORMAT A3	SOURIAI 8D011	U
	Н	G	l F	E	D	C	

