
	т п	D	0	σ		
			LAYOUT SHOW	N AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS	Connector dimension]				
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite	DimNominalØS32.5 Max	-				
-Shell Material : Composite -Shell Plating : Without Plating	Z 31 Max VV THREAD M22x1-6g	-	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with			
-Insulator : Thermoplastic	W THICKD WIZZATOB	-	the Specifications issued by e	ither of the Parties or by a thi		
-Contacts : Copper Alloy			(professional recomm	mendation, technical notice.)		
-Seals & Grommet : Silicon Elastomer			Γ	Country Jurisdiction &	& Control List	
-Contact Plating : Gold over copper Alloy 0.8µm minimum			CountryJurisdiction & Control ListFRNot Listed			
-Durability : 500 Mating cycles						
-Delivered with Souriau contacts and Accessories			PN: 8D515X05PD			
-Temperature Range <u>-</u> -65°C to +175°C						
-Salt Spray : 2000 hours		A 19-10-2	2016 First Release			
Mass : 21.4 g ± 10%		ISS DAT			MOD) N°
		Designed By:	Date:		OMER DRAWING	
		TITLE	TITLE Composite Plug 8D series			
BASIC SERIES: 8D 5 - 15 X 05	5 P D	SCALE	General I Talaran		PRDS / PROJECT	
SHELL TYPE : Plug with RFI Shielding		NA	Toleran		859	
CONTACT TYPE : Standard Crimp Contact					This document is the property of	
SHELL SIZE : 15	CONTACT TYPE : PIN(SOURIAU WWW.SOURIAU.COM it must not be reproduced or			
					1	
	CONTACT LAY	OUT: 15-05	SOUR	IAU DRG N°	SHEE	ΕI
PLATING : X = Without Plating		A3		15X05PD-C	1/2	

	工	G	г	m	D	0
4		Contact Layout x e e e e e e e e				
		X-axis (mm) Y-axis (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)				
ω						
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						PN: 8D515
						16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Compo
_ _					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D515X
	Н	G	F	E	D	C

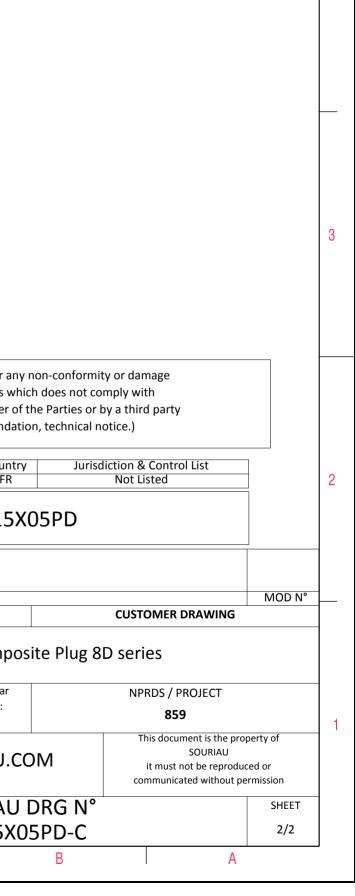

4