

Antenna - RAD-ISM-2400-ANT-OMNI-9-0 - 2867623

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Omnidirectional antenna, 2.4 GHz, gain: 9 dBi, polarization: linear, opening angle: h/v 360°/15°, degree of protection: IP65, connection: N (female), incl. mounting bracket and mast clips

Your advantages

- For medium distances
- For freely mobile applications
- For multipoint or mesh connections



Key Commercial Data

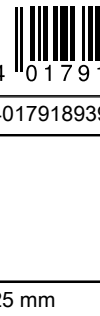Packing unit	1 pc
GTIN	
GTIN	4017918939007

Technical data

Dimensions

Width	25 mm
Height	625 mm

Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 75 °C
Ambient temperature (storage/transport)	-40 °C ... 75 °C

General

With connecting cable	No
Frequency range	2.4 GHz
	2.4 GHz
Horizontal beamwidth	360 °
Vertical beamwidth	15 °

Antenna - RAD-ISM-2400-ANT-OMNI-9-0 - 2867623

Technical data

General

Polarization	Linear vertical
Impedance	50 Ω
Gain	9 dBi
Connection method	N (female)
Material	Fiberglass-reinforced plastic (Antenna housing)
	Aluminum (Bracket)
	V2A (U-shaped screw)
Mounting type	Mast mounting or wall mounting
External diameter	28 mm ... 47 mm (Mast)


Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Antenna - RAD-ISM-2400-ANT-OMNI-9-0 - 2867623


Schematic diagram

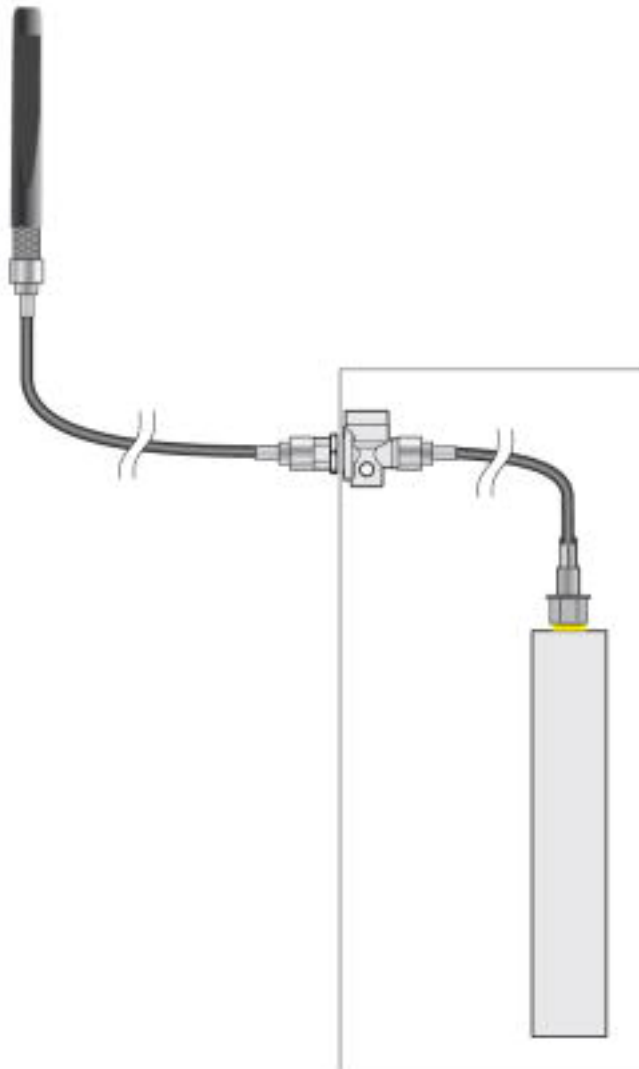

Installation example

Antenna - RAD-ISM-2400-ANT-OMNI-9-0 - 2867623

Schematic diagram

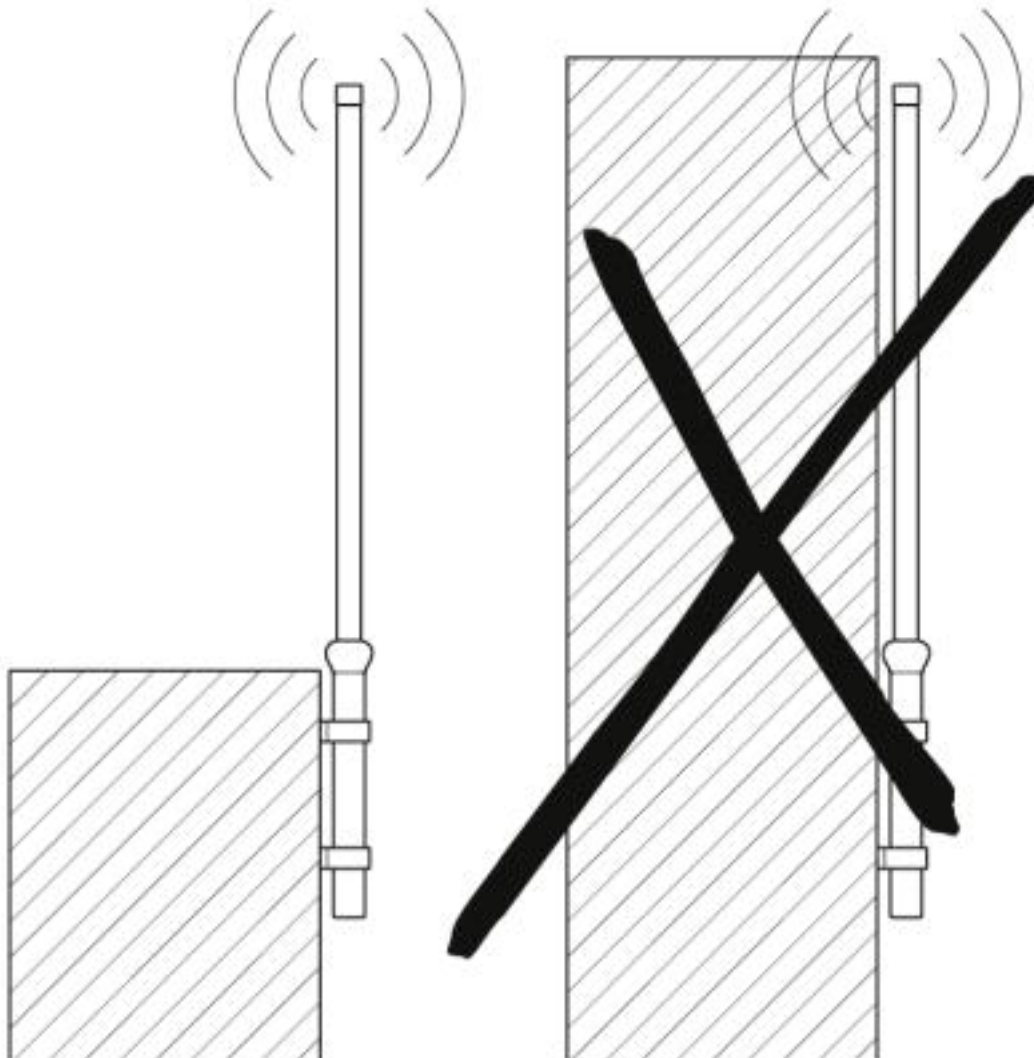

Mounting

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>