



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
IAL	(1)

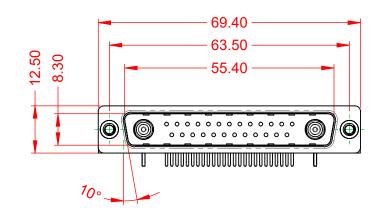




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 COPPER ALLOY, 30µ" GOLD PLATED




POWER/CO-AX CONTACT RATING:	75Ω (IMPEDANO
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	<b>5A PER CONTA</b>
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

ICE) ACT

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-27W2640-7NC		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-27W2	2640-7NC	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. STEEL, NICKEL PLATED -55°C ~ 125°C

ORIGINAL

