

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	(1)

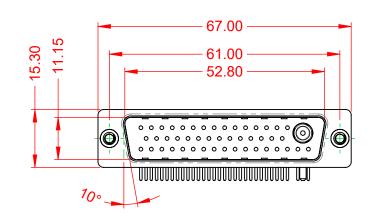




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




POWER/CO-AX CONTACT RATING:	10A (CURRENT)
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

.X ±0.25 .XX ±0.13 .XXX ±0.05

1000V AC rms

-55°C ~ 125°C



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
				DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE TORONTO, CONTARIO CANADA		SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 629-47W1640-1T2		ISSUE	
			PART NUMBER: 629-47W	1640-1T2	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

