
Ŧ	G	т	m	0





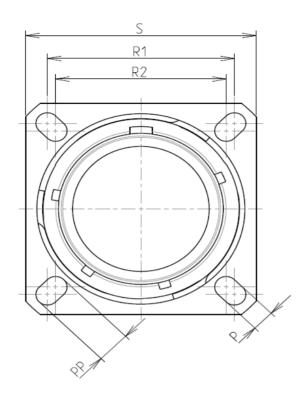

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8μm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	 -65°C to +200°C 			
	: 500 hours			
-Salt Splay	. 500 110015			
-Mass	: 105.91 g ± 10%			
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Sourian -Temperature Range -Salt Spray			

8D 0

G

21

S

48

В

F

D


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : D

CONTACT LAYOUT : 21-48

CONTACT TYPE : SOCKET(500 Matings)

Е



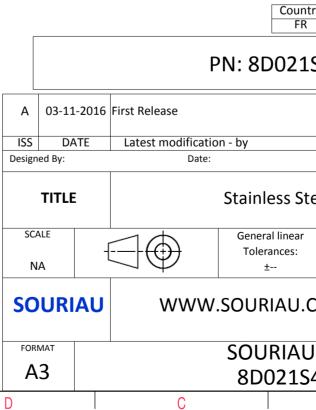

	σ		Þ		_	
C					4	
S EXAMP	LE				3	
which doer of the F	pes not co Parties or k echnical n Jurisd	by a third part			2	
					_	
		CUSTOMFI	R DRAWING	MOD N°		
Steel Receptacle 8D series					-	
ar			/ PROJECT 359 1			
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DR S48B				SHEET 1/2		
	B		A	I	L	

	Ŧ	۵	וד	m	D	0	
		Contact Layout				Pa	anel Cut
4		48			2	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc	4#8 Power 21-48 X Y			¥ (ØA.	<u>87</u>
ى	A B C D	4.57 4.57 4.57 -4.57 -4.57 -4.57 -4.57 4.57				Dim ØA ØAA R1 ØT	
	-					SOURIAU shall not be lia due to a use of the Pro	oducts
0						the Specifications issued b (professional reco	Cour Fi
					ISS DATE	5 First Release	J021
					Designed By: TITLE SCALE		ral linear
					NA SOURIAU		rances: ± RIAU.

F

Е

G

Н

FORMAT

A3

D

С

