

CTS series

- Chip type with 8Φ~16Φ, 125°C, 5000 hours, long life product
- Designed for automobile modules and other high temperature applications
- AEC-Q200 Compliant
- RoHS Compliant



SPECIFICATIONS

Items	Characteristics				
Capacitance Tolerance	±20% (120Hz, 20°C)				
Operating Temperature Range	-40°C ~ +125°C				
Rated Voltage Range	16 ~ 50VDC				
Capacitance Range	33 ~ 2200μF				
Leakage Current	I ≤ 0.01CV or 3(μA), which is greater. (After 2 minutes application of DC rated voltage at 20°C)				
Dissipation Factor (tan δ)	Measurement Frequency: 120Hz. Temperature: 20°C				
	Rated Voltage(V)	16	25	35	50
	tan δ (Max)	0.20	0.20	0.14	0.14
Low Temperature Stability	Measurement Frequency: 120Hz				
Impedance Ratio(Max)	Rated Voltage(V)	16	25	35	50
	Z(-25°C) / Z(20°C)	5	2	2	2
	Z(-40°C) / Z(20°C)	8	4	3	3
Load Life	Φ6.3~Φ10: 2000 hours; Φ12.5: 3000 hours; Φ16: 5000 hours with application of rated voltage at 125°C				
	Capacitance Change	within ±30% of Initial Value			
	tan δ	300% or less of Initial Specified Value			
	Leakage Current	Initial Specified Value or less			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours 125°C without voltage applied. Before the measurement, the capacitance shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.				
	Capacitance Change	Within ±30% of Initial Value			
	tan δ	300% or less of Initial Specified Value			
	Leakage Current	Initial Specified Value or less			
Resistance to Soldering Heat	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds.			Capacitance Change	Within ± 10% of Initial Value
	After removing from the hot plate and restored at room temperature, they meet the characteristics requirements listed at right.			tan δ	Initial Specified Value
				Leakage Current	Initial Specified Value or less
Marking	Black print on the case top				

Frequency Coefficient of Permissible Ripple Current

Frequency (Hz)	100 ≤ F < 1K	1K ≤ F < 10K	10K ≤ F < 100K	100K ≤ F
Capacitance (μF)				
Coefficient	0.60	0.85	0.93	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

DIMENSIONS(mm)

■ Chip Type

Fig.2 $\Phi D=6.3\sim 10\text{mm}$







Fig.3 $\Phi D \geq 12.5\text{mm}$

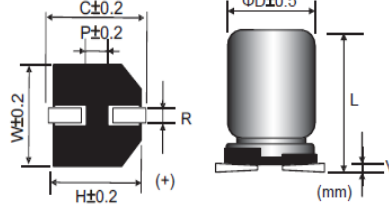

■ Land / Pad pattern

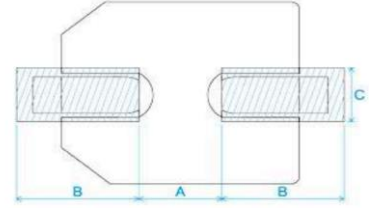

Size	ΦD	L	W	H	C	R	P	Vmax
6.3*6	6.3	6±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
6.3*7.7	6.3	7.7±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
8*10	8.0	10±0.5	8.3	8.3	9.0	0.7~1.1	3.2	0.3
10*10	10.0	10±0.5	10.3	10.3	11.0	0.7~1.3	4.5	0.3
12.5*13.5	12.5	13.5±0.5	13.0	13.0	13.7	1.1~1.4	4.5	0.4
16*16.5	16.0	16.5±0.5	17.0	17.0	18.0	1.4~1.8	6.4	0.4
16*21.5	16.0	21.5±0.5	17.0	17.0	18.0	1.4~1.8	6.4	0.4

DxL	A	B	C
$\Phi 4$	1	2.6	1.6
$\Phi 5$	1.4	3	1.6
$\Phi 6.3$	1.9	3.5	1.6
$\Phi 8$	3	3.5	2.5
$\Phi 10$	4	4	2.5
$\Phi 12.5$	4.3	5.8	2.5
$\Phi 16$	6.6	6.5	5
$\Phi 18$	6.6	7.7	5
$\Phi 8(G)$	2.5	4.5	4.7
$\Phi 10(G)$	3.8	4.8	4.7
$\Phi 12.5(G)$	3.8	6.1	6.9
$\Phi 16(G)$	5	8	9.5
$\Phi 18(G)$	5	8.6	9.5

"(G)" "Anti-vibration Structure"

Electric Characteristics

Su'scon P/N	Cap. (μF)	Cap. Tol. (%)	Rate Volt. (V-DC)	Surge Volt. (V-DC)	Oper. Temp. ($^{\circ}\text{C}$)	Nominal Case Size D*L(mm)	Leakage Current Max (μA)	D.F. MAX (%)	R.C 100KHz (mA rms)	IMP 100KHz at 25 $^{\circ}\text{C}$ (Ω)Max	Load Life (hours)
CTS035M101E7DPE50V00A	100	±20	35	40.3	125	6.3*7.7	35	14	197	0.300	2000

REMARKS:

1. Dissipation Factor Test: at 20 $^{\circ}\text{C}$, 120 Hz
2. Capacitance Test: at 20 $^{\circ}\text{C}$, 120 Hz
3. Ripple Current Test: at 125 $^{\circ}\text{C}$, 100K Hz
4. Leakage Current: Initial specified value or less
5. When have characteristic requested: Load life & shelf life test and etc., judgment standard reference to our catalogue.
6. Remarks: Su'scon Part Number with suffix code "A" is specially offered for automotive project, which meets AEC-Q200 standard.

US Contact Information

Tony Yang

Lumimax Optoelectronic Technology

Tel: +1 510 241 9686

Mobile: +1 510 364 7157

Email: tony.yang@lumimaxusa.com

DONG GUAN KUAN KUN ELECTRONIC CO., LTD

YIN HE INDUSTRIAL ZONE, QING XI TOWN, TEL: +86-769- 87318000
DONG GUAN CITY, GUAN DONG CHINA (P.R.O.C) FAX: +86-769- 87318008

CTS-REV.1