


PEH205KC5100QB0

PEH205, Aluminum Electrolytic, 10,000 μ F, -10/+30%, 40 VDC, -55/+125°C

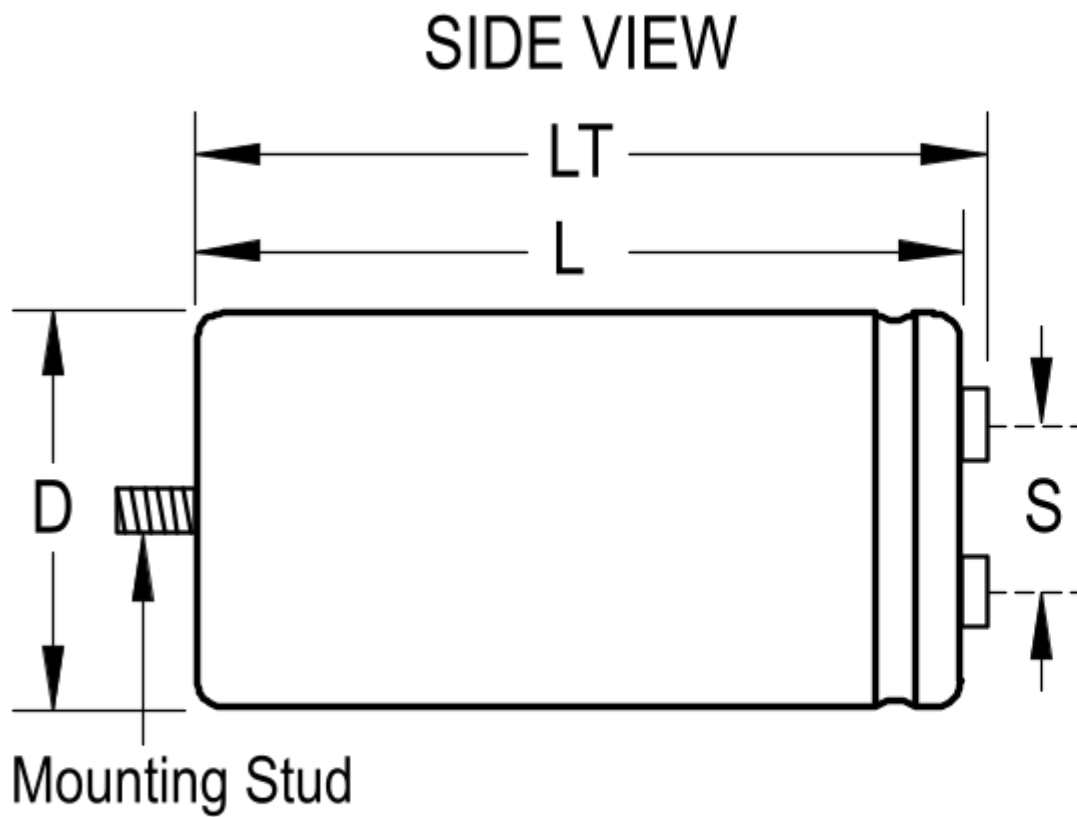

Click [here](#) for the 3D model.

Dimensions

- D 35mm +/-0.4mm
- L 73.5mm +/-1mm
- S 13mm +/-0.5mm
- F 8mm NOM
- DT 8mm NOM

Dimensions

LT 80mm +/-1mm

Packaging Specifications

Packaging Bulk, Bag

General Information

Series	PEH205
Dielectric	Aluminum Electrolytic
Description	Screw Terminal, Aluminum Electrolytic
RoHS	Yes
Mounting	Stud
AEC-Q200	No
Halogen Free	Yes
Component Weight	105 g
Notes	M5. MS = M8x12.
Shelf Life	156 Weeks

Specifications

Capacitance	10,000 uF
Capacitance Tolerance	-10/+30%
Voltage DC	40 VDC
Temperature Range	-55/+125°C
Rated Temperature	125°C
Life	4000 Hrs
Resistance	18 mOhms (100Hz 20C), 10 mOhms (20kHz 20C)
Ripple Current	6.8 Amps (100Hz 125C), 18.9 Amps (100Hz 85C), 26.6 Amps (100Hz 40C)
Leakage Current	804 uA (5min 20°C)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 708d693a-b0f1-496f-9ae5-fa0e5af5ffb3

© 2006 - 2023 KEMET

Generated 5/18/2023 - 708d693a-b0f1-496f-9ae5-fa0e5af5ffb3

© 2006 - 2023 KEMET