

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

Å	

ISSUE NUMBER	
ORIGINAL	

(1)

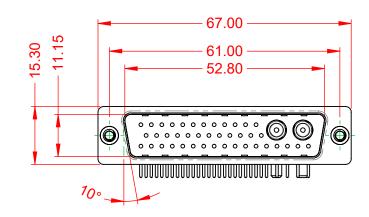




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05


DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

20A (CURRENT)

-55°C ~ 125°C

1000V AC rms



					SW REFERENCE NO.: 629 COMBO ASSEMBLY						
COME	COMBINATION D-SUB			DRAWN: C.B			DATE: JAN. 01/2019				
			CHECKED:			DATE:					
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE:	(IN C.A.D. 1:	1)	SHEET	1	OF	2			
	YOUR CONNECTION TO QUALITY & SERVICE SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-43W2240-2N2					ISSUE				
YOUR CONNECTION TO QUALITY			PART NUM	MBER:	629-43W2	2240-2N2			1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

