

	Т	Q	н п	m	0	1
l						



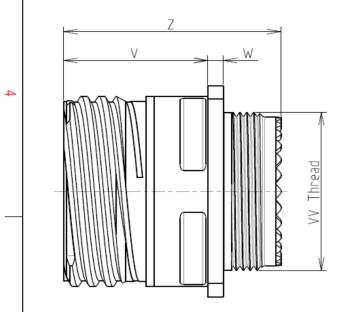

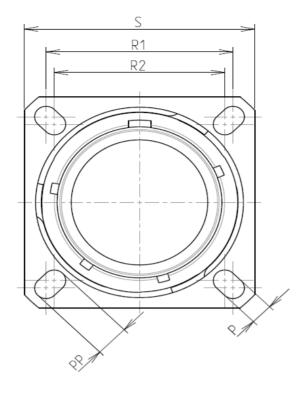

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	-65℃ to +175℃

: 2000 hours

: 32.8 g ± 10%

8D 0

G

21

Х

11

Ρ

F

С


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-11



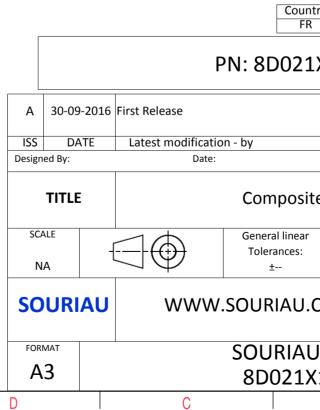

	Φ		A			
					4	
AS EXA	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
untry FR	Jurisd	liction & Cor Not Listed]	2	
1X11PC						
				MOD N°	-	
		CUSTOM	ER DRAWING			
site	e Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
	This document is the property of					
J.CC	.COM SOURIAU it must not be reproduced or communicated without permission					
	DRG N°	1		SHEET		
.X1	1PC-C		٨	1/2	J	
	В	I	A			

	T	G	н т	m	D	0	
		Contact Layout					Panel Cutout
4	-х ($ \begin{array}{c} & & & & \\ & & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	B +:306 (7.77) C +:348 (8.84) D +:227 (5.77) E +:000 (0.00) F -:227 (5.77) Shell Arrangement size no.	Y-axis (mm) position ID X-axis (mm) Y-axis (mm) +.332 (8.43) G 348 (8.84) 061 (1.55) +.177 (4.50) H 306 (7.77) +.177 (4.50) 061 (1.55) J 121 (3.07) +.332 (8.43) 270 (6.86) K +.000 (0.00) +.112 (3.12) 353 (8.97) L +.000 (0.00) 115 (2.92)	s		¥ 22		
ယ			-			Din ØA ØA/ R1 ØT	A
$ \longrightarrow $							
						SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products whi by either of
N							Country FR
						PN: 8	3D021X
					A 30-09-2	016 First Release	
	-				ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Co	omposite
_					SCALE NA		neral linear blerances: ±
					SOURIA	U WWW.SOL	JRIAU.CO
					FORMAT A3		URIAU D021X1
	Н	G	F	E	D	С	

