

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

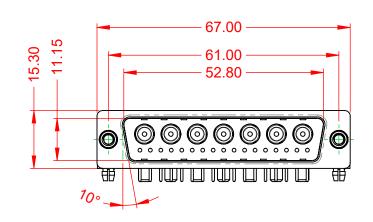




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING:	30A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

IT)


-55°C ~ 125°C

АСТ

1000V AC rms



			SW REFERENCE NO.: 629 C	OMBO ASSEMBLY	
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA	CANADA OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-24W	7640-3TD	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-24W	7640-3TD	1



COMPLIANT

