



(1)

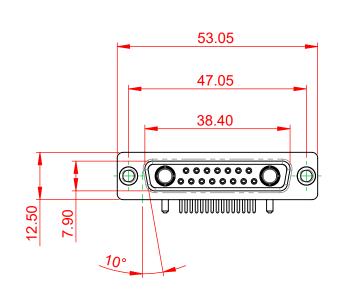




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING SIGNAL CONTACT RESISTANCE:	: 5A PER CONTACT 10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

.XX ±0.13


.XXX ±0.05



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/20	19
		CHECKED:	DATE:	
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-17W	2240-1N1	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-17W	2240-1N1	1

5000MΩ min.

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

