


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** 

ORIGINAL


(1)



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 COPPER ALLOY, GOLD FLASH PLATED

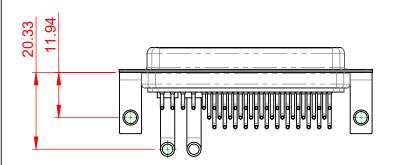

STEEL, TIN PLATED

**OPERATING TEMPERATURE:** 

.X ±0.25 .XX ±0.13


.XXX ±0.05

**POWER/CO-AX CONTACT RATING:** 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

-55°C ~ 125°C

1000V AC rms



| COMBINATION D-SUB  |  | SW REFERENCE NO.: 630 COMBO ASSEMBLY |                  |       |
|--|--|--------------------------------------|------------------|-------|
|  |  | DRAWN: C.B                           | DATE: JAN. 01/20 | 19    |
|  |  | CHECKED:                             | DATE:            |       |
| EDAG INC<br>TORONTO, ONTARIO<br>CANADA<br>YOUR CONNECTION TO QUALITY & SERVICE | THESE DRAWINGS AND SPECIFICATIONS<br>ARE THE PROPERTY OF EDAC INC.,AND<br>SHALL NOT BE REPRODUCED,OR COPIED<br>OR USED AS THE BASIS FOR THE<br>MANUFACTURE OR SALE OF APPARATUS<br>WITHOUT WRITTEN PERMISSION. | SCALE: (IN C.A.D. 1:1)               | SHEET 1 OF       | 2     |
|  |  | DRAWING NUMBER: 630-43W2250-4T4      |                  | ISSUE |
|  |  | PART NUMBER: 630-43W                 | 2250-4T4         | 1     |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

