
	т 	m	D	0			
Z'	ØS				AYOUT SHOWN AS EXAMPLE		
	Keying Shown as	- overale		L			
CHARACTERISTICS-Standard : Based on MIL-DTL-38999 Series III-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer-Contact Plating: Gold over copper Alloy 0.8µm minimum-Durability: 500 Mating cycles-Delivered with Souriau-ontacts and Accessories-Temperature Range: -65°C to +175°C-Salt Spray: 2000 hours		Connector dimensionDimNominalØS44.9 MaxZ'31.5 MaxVV THREADM34x1-6g	A	due to a us the Specification (profes	PN: 8D523J06SE	omply with by a third party	MOD N°
			Designed			CUSTOMER DRAWING	MODIN
			т	ITLE	Composite Plug	BD series	
BASIC SERIES:     8D     5     -     23     J       SHELL TYPE     : Plug with RFI Shielding     -     -     23     J	06 S E		SCALE		General linear Tolerances: ±	NPRDS / PROJECT <b>859</b>	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 23		ORIENTATIO	SUL	JRIAU WWW	V.SOURIAU.COM	This document is the prope SOURIAU it must not be reproduce communicated without per	ed or
PLATING : J = Olive drab Cadmium		CONTACT LAYOUT :			SOURIAU DRG N° 8D523J06SE-C		SHEET 1/2
					0032310031-0		, –

r	т	۵	г П	т	D	0
		Contact Layout				
		06				
4						
		$\mathbf{\bullet}$				
	6	6#8 Concentric Twinax Service M				
		23-06	]			
	Ctc	X Y	1			
	A	0 9.24				
	В	8.81 2.87	-			
	С	5.43 -7.49	-			
ယ	D	-5.43 -7.49	-			
	F	-8.81 2.87 0 0	-			
			J			
						SOURIAU shall not be liable for an
						due to a use of the Products w
						the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D523
					A 06-10-20	16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					Designed by.	
					TITLE	Compo
					SCALE	General linear
<b>→</b>					NA	t
					SOURIA	U WWW.SOURIAU.
					FORMAT	
					A3	SOURIAU
l					1	8D523J
	Н	G	F	E	D	C

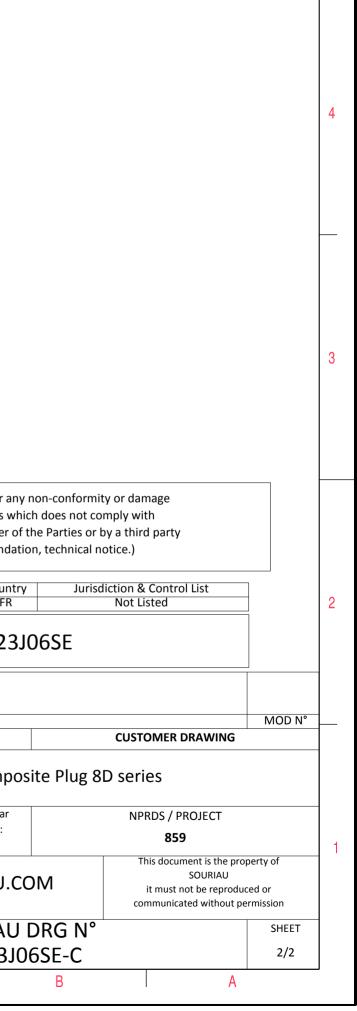

ω