

**Technical specification/
Technische Daten:**

Working voltage/ Betriebsspannung: IEC 664-1	100 VDC
Current rating/ Strombelastbarkeit:	7,5 A (UL) / 5 A (CSA, VDE)
Insulation resistance/ Isolationswiderstand:	≥ 1 GΩ
Dielectric withstanding voltage/ Spannungsfestigkeit (DWV):	424 VDC
Temperature working range/ Umgebungstemperatur:	- 25 °C ... + 105 °C
Capacitance value/ Kapazitätswert:	370 pF ± 20 %
Mating cycles/ Steckzyklen:	Quality class 1 = 500 Gütestufe 1 Quality class 2 = 200 Gütestufe 2 Quality class 3 = 50 Gütestufe 3

**Materials/
Werkstoffe:**

Contact/ Kontakt:	Cu alloy, Au over Ni Contact tails pretinned/ Kontaktspitzen verzinkt
Insulator/ Isolierkörper:	High temp. PA UL 94 V-0
Shell/ Gehäuse:	Steel, Sn over Ni
Metal bracket/ Metallwinkel:	GD-Zn, Sn over Ni
Threaded insert/ Gewindeeinsatz:	Cu alloy, Sn over Ni
PCB snap/ PCB Clip:	Cu alloy, Sn over Ni
Fixing plate/ Zentrierplatte:	High temp. PA UL 94 V-0

**Installation specification/
Montagedaten:**

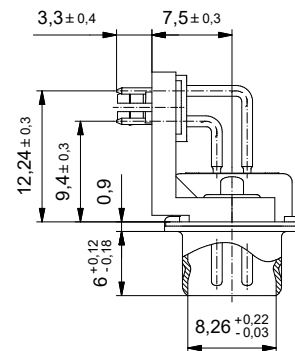
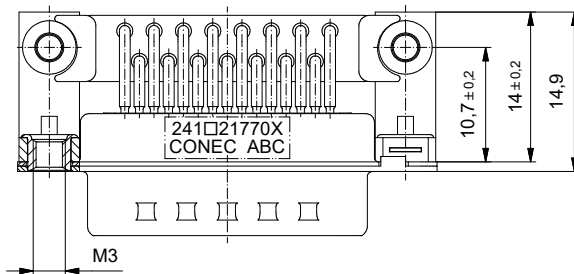
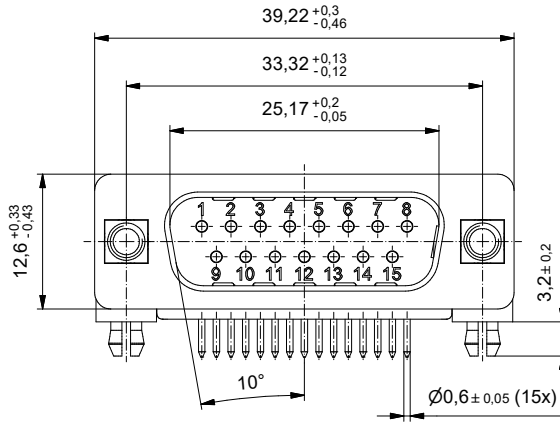
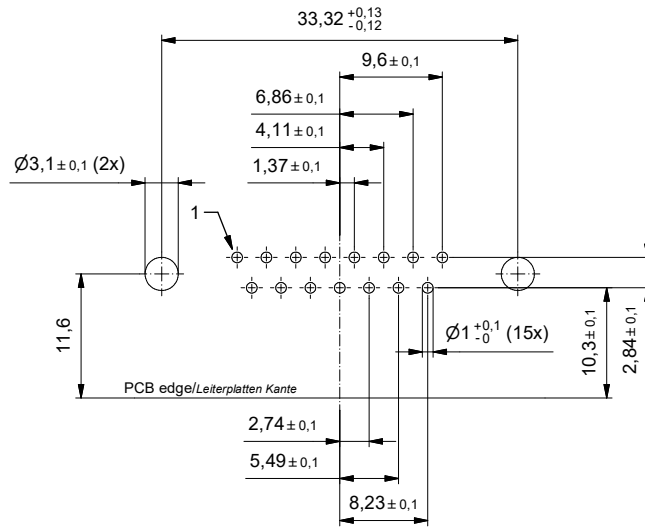
Solder parameter/ Lötparameter:	
Solder preheat temperature/ Vorheiztemperatur:	100 °C for 30 sec./ 100 °C für 30 Sek.
Solder bath temperature/ Lötbadtemperatur:	260 °C for 5 sec./ 260 °C für 5 Sek.
PCB hole drillings/ Leiterplattenbohrbild:	see sheet 2/ siehe Seite 2
Recommended torque value for thread/ Empfohlenes Drehmoment für Gewinde:	max. 6 in.LB/ max. 67 Ncm
PCB snap for hole diameter/ PCB Clip für Lochdurchmesser:	Ø3,1 mm
PCB thickness/ Leiterplattenstärke:	1,6 mm

Part no. / Part marked/ Art.-Nr. / Bedruckung:	Quality class/ Gütestufe:	Contact plating/ Kontakt Veredelung:
241A21770X	3	Gold flash over nickel Gold über Nickel
241B21770X	2	20 µin hard gold over min. 50 µin nickel 20 µin Gold über min. 50 µin Nickel
241C21770X	1	30 µin hard gold over min. 50 µin nickel 30 µin Gold über min. 50 µin Nickel



		D-SUB C-Filter Male 15pos. Solder pin angled 0.370 inch with metal bracket, threaded insert, fixing plate, PCB snap D-SUB C-Filter Stift 15pol. Lötstift abgewinkelt 9,4 mm mit Metallwinkel, Gewindeeinsatz, Zentrierplatte, PCB Clip												
<table border="1"> <tr> <th>Date/Datum</th> <th>Name</th> </tr> <tr> <td>drawn/ 24.06.2020</td> <td>Lehmenkühler</td> </tr> <tr> <td>appd./ 24.06.2020</td> <td>Schmidt</td> </tr> </table>			Date/Datum	Name	drawn/ 24.06.2020	Lehmenkühler	appd./ 24.06.2020	Schmidt						
Date/Datum	Name													
drawn/ 24.06.2020	Lehmenkühler													
appd./ 24.06.2020	Schmidt													
<table border="1"> <tr> <td>Index: a Original</td> <td>scale/ Maßstab: 2:1</td> </tr> <tr> <td>Status: Freigegeben</td> <td></td> </tr> <tr> <td>RoHS compliant/ konform</td> <td></td> </tr> </table>	Index: a Original	scale/ Maßstab: 2:1	Status: Freigegeben		RoHS compliant/ konform			<table border="1"> <tr> <td>dwg no / Z.-nr.:</td> <td>24K1A1946</td> <td>DIN-A3</td> </tr> <tr> <td></td> <td></td> <td>1 / 2</td> </tr> </table>	dwg no / Z.-nr.:	24K1A1946	DIN-A3			1 / 2
Index: a Original	scale/ Maßstab: 2:1													
Status: Freigegeben														
RoHS compliant/ konform														
dwg no / Z.-nr.:	24K1A1946	DIN-A3												
		1 / 2												

This reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. For further information on our legal notices please refer to our privacy policy (www.conec.com/privacy-policy) and our terms of use (www.conec.com/terms-of-use).

PCB hole drillings
(PCB top side)
Leiterplattenbohrbild
(Leiterplatten Oberseite)



This reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. For further information on our products, please refer to our website: www.conec.com. For more information on our products, please refer to our website: www.conec.com.

		 dim. in mm		D-SUB C-Filter Male 15pos. Solder pin angled 0.370 inch with metal bracket, threaded insert, fixing plate, PCB snap D-SUB C-Filter Stift 15pol. Lötstift abgewinkelt 9.4 mm mit Metallwinkel, Gewindeeinsatz, Zentrierplatte, PCB Clip			
		Date/Datum	Name			dwg no / Z.-nr.: 24K1A1946	
		drawn/gez.	24.06.2020				
Index:	a Original	appd./gepr.	24.06.2020	Schmidt	DIN-A3 2 / 2		
Status:	Freigegeben	scale/maßstab:					
RoHS compliant/konform		2:1					