




## LA45-10X32-PS

Ruland Adjustable Clamping Lever, Lever Length 45mm, Tapped Hole #10X32, Plastic Lever, Stainless Steel Inserts

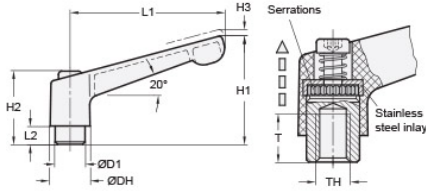


### Description

Ruland LA45-10X32-PS is an adjustable clamping handle with a 45mm handle, 10X32 tapped hole, 10mm insert diameter, and 35mm overall height. The handle is plastic and the inserts are stainless steel for reduced weight, easier adjustment of the handle in light duty applications, and use in corrosive environments. LA45-10X32-PS is commonly found in packaging, printing, food processing, and medical systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A 10X32 tapped hole is designed to mate with an equivalently sized threaded stud or rod for a quick installation. LA45-10X32-PS is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by JW Winco, stocked by Ruland, and RoHS3 and REACH compliant.

### Product Specifications

Thread (TH)	#10-32 TPI	Lever Length L1	45 mm
Overall Height H1	35 mm	Hub Height H2	24.5 mm
Hub Diameter DH	14.5 mm	Handle Disengagement Travel H3	3.5 mm
Thread Depth T	9 mm	Sleeve Length L2	4 mm
Sleeve Diameter D1	10 mm	Handle Material	Plastic
Handle Color	Black	Insert and Screw Material	303 Stainless Steel
Weight (lbs)	0.032400	Manufacturer	JW Winco/ Otto Ganter
UPC	634529237595	Country of Origin	USA
Tariff Code	3926.90.2500	UNSPC	31162807

**Prop 65**  **WARNING** This product can expose you to the chemical Nickel (metallic), known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).