

Electronic housing - DCS 5,7 L 1F R W C 7035 - 2203176

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Display housing, 5.7", light gray, consisting of two half shells with screws, window on the left. Front 1.1 mm recessed, keypad area on the right recessed for wall installation

Your advantages

- ☑ Display housings for mobile and stationary operator panels
- ☑ Degree of protection: up to IP54
- ▼ Temperature range: -20°C to +50°C
- ▼ Flammability rating UL 94-V0



Key Commercial Data

Packing unit	2 pc
GTIN	4 055626 378329
GTIN	4055626378329

Technical data

Item properties

·	
Туре	DCS 5,7 L 1F R W C 7035
Order No.	2203176
Housing type	Display housing
Battery compartment	for APP battery housing
Wall fastening	yes
Ventilation openings present	no

Measurements

Width [w]	224 mm
Height [h]	157 mm



Electronic housing - DCS 5,7 L 1F R W C 7035 - 2203176

Technical data

Measurements

Depth [d]	40 mm
Diagonal	5.7 in. (Window for display)
Dimensions	118 mm x 88 mm (Window for display, left position)
	44 mm x 104.8 mm (recessed area on the front, right position for membrane keypad)
	28.5 mm x 3.5 mm (Opening for the membrane keypad cable)

Material specifications

Flammability rating according to UL 94	V0
Housing material	ABS

Packaging information

Pieces per package	2
Denomination packing units	Pcs.


Standards and regulations


Flammability rating according to UL 94	V0
--	----

Drawings



Electronic housing - DCS 5,7 L 1F R W C 7035 - 2203176



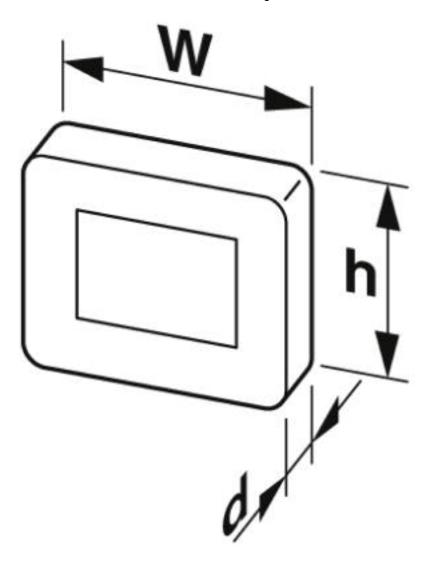

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com