⊥ <u>Ω</u>	т т		с ш		
Z'	ØS				
CHARACTERISTICS	Keying Shown as example		LAYOUT SHOWN AS EXAMPLE		
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	d	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed			
-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories-Temperature Range: -65°C to +175°C-Salt Spray: 2000 hours		A 15-10-2016 First Rele ISS DATE Latest Designed By:	PN: 8D511J22HE ease modification - by Date:	MOD N° CUSTOMER DRAWING	
BASIC SERIES: 8D 5 - 11	Ј 22 Н Е		Composite Plug 8	SD series NPRDS / PROJECT 859	
 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 	ORIENTAT CONTACT TYPE : PIN (1500 M		₩WW.SOURIAU.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permission SHEET	

		۵	гт —	m	D	0	
4		Contact Layout 22*					
	Ctc A B	4#22D 11-22 X Υ 1.905 1.905 1.905 -1.905					
ω	D	-1.905 -1.905 -1.905 1.905					
						the Specifications i	f the Products v
N						Р	Coun FR N: 8D511
					A 15-10-2 ISS DAT Designed By:	2016 First Release E Latest modification Date:	- by
_					TITLE SCALE NA		Comp General linear Tolerances: ±
					FORMAT		SOURIAU.

G

Н


F

Е

A3

D

С

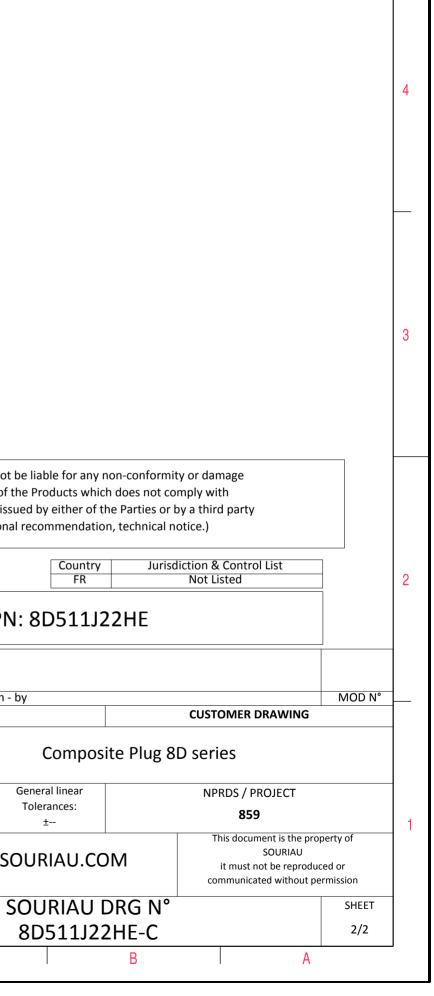

 \triangleright

σ