



S21 TRANS LOG MAG.
▶0.000 dB 0.200 dB/DIV

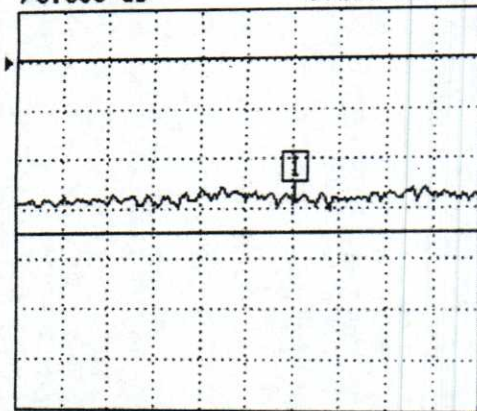


33.00000000 GHz 37.00000000

S11 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIV

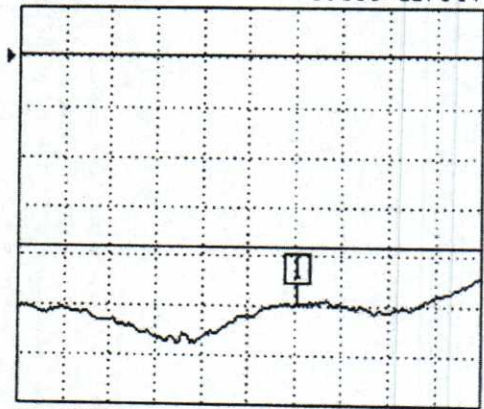


33.00000000 GHz 37.00000000

S22 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIV

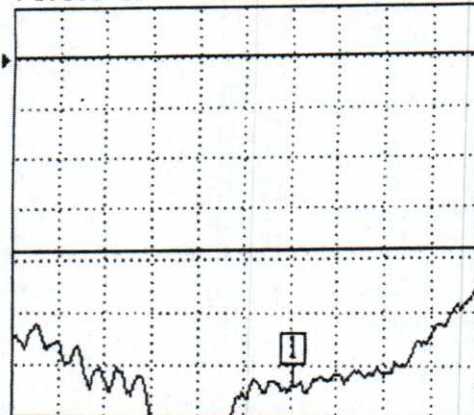

33.00000000 GHz 37.00000000

S12 TRANS LOG MAG.
▶0.000 dB 5.000 dB/DIV

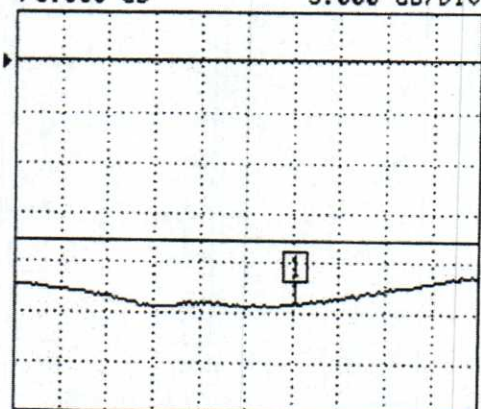

33.00000000 GHz 37.00000000

CH 1 - S21
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
35.44000000 GHz
-0.586 dB

MARKER TO MAX
▶MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3I3337 Isolator

Isolation: 18 dB Min
Insertion Loss: 0.70 dB Max
VSWR: 1.25:1 Max
K-F connectors