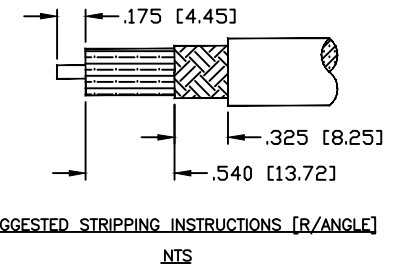
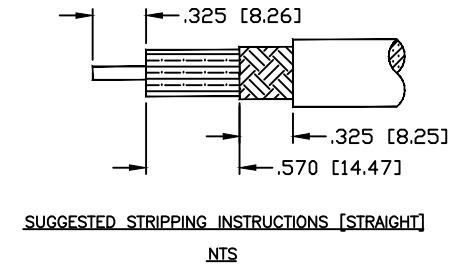

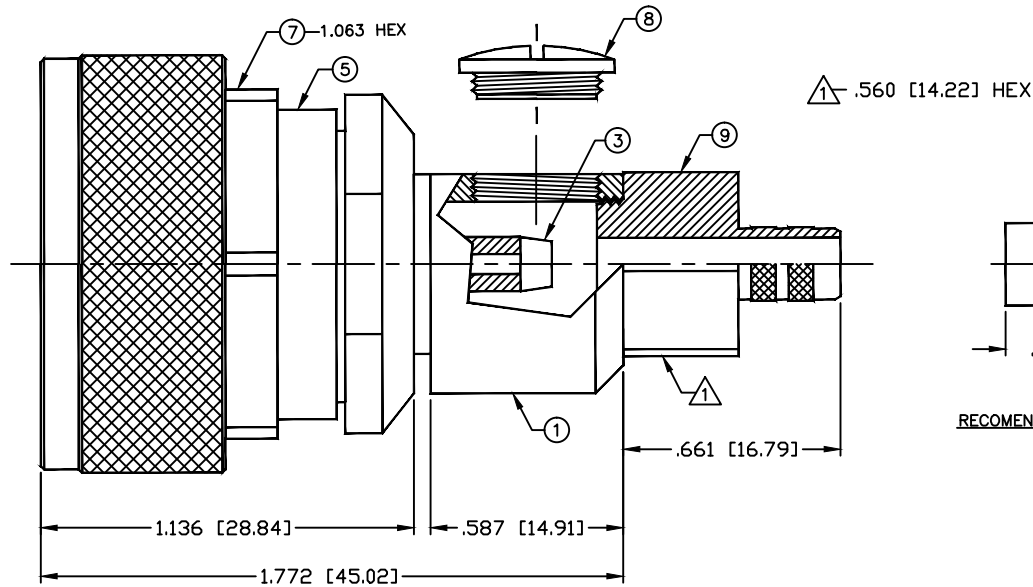


PART NO.

RFD-1605-2-X

REV	DESCRIPTION	DWN	DATE	APPROVED
A	CHANGED FERRULE STUD & UPDATED DWG FORMAT	CZS	03/12/15	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-7.5 GHz

PEAK POWER: 13.2 Kw max.

AVERAGE POWER: 3.0 Kw max.

TEMPERATURE RANGE: -55°C TO 150°C

FOR RG-8/X, BELDEN 9258, MAXRAD MBX-100 &

MBX-1000, MICRO 8/U, REMEE 1600, SAXTON 8315 &

TIMES LMR-240 & LMR-240 ULTRAFLEX CABLE

1	BODY	1	BRASS	SILVER, 80 μ "
2	PIN	1	BRASS	SILVER, 80 μ "
3	CONTACT	1	BRASS	SILVER, 80 μ "
4	INSULATOR	1	PTFE	---
5	GROUND RING	1	BRASS	SILVER, 80 μ "
6	GASKET	1	RUBBER	---
7	SHELL	1	BRASS	SILVER, 80 μ "
8	SCREW CAP	1	BRASS	SILVER, 80 μ "
9	BACK NUT	1	BRASS	SILVER, 80 μ "
10	FERRULE	1	BRASS	SILVER, 80 μ "

#	DESCRIPTION	QTY	MATERIAL	FINISH
---	-------------	-----	----------	--------

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUNIGA 03/12/15
CHECKEDORJ DRAWN
C. ZUNIGA 05/08/03**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX**7/16 DIN PLUG CRIMP**

STRAIGHT / RIGHT ANGLE COMBO

SIZE	CABLE GROUP	DWG NO.	REV
A	X	RFD-1605-2-X	A
SCALE:	ENGINEERING ID:	000000	SHEET 1 OF 1
NTS			