

Fuse DTII 500V



See below:  
[Approvals and Compliances](#)

---

### Description

- Operation full range cable defensive fuses
- Over-load and short-circuit protection
- Colored characteristic detector in the middle
- Characteristic gG
- According to IEC 269

---

### Technical Data

Rated Current In	2- 25A
Rated Voltage	500 VAC
Breaking Capacity	50kA
Rated Power Operating Frequency fe	50Hz

---

### Basic Design

Insulator	Ceramic
Metal components	Brass

---

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

---


### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
<a href="#">REACH</a>	<a href="#">REACH</a>	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

**Time-Current-Curves**

DT II - DT III

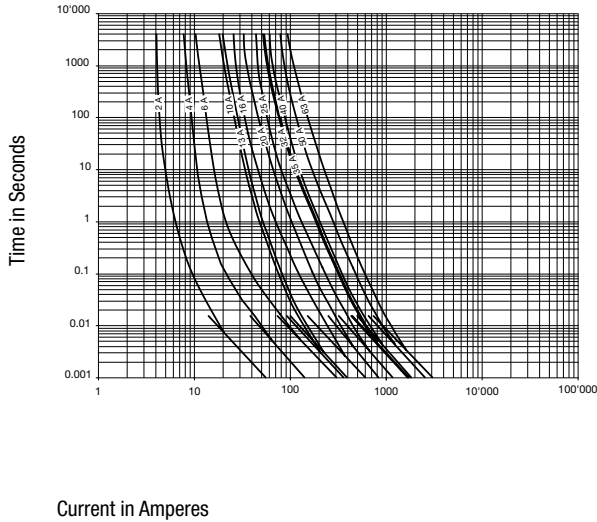

**All Variants**

Rated current	Color	Packaging unit	Order Number	E-No.	
[A]		ST			
2	rosé	25	0001.2021	800250209	■
4	brown	25	0001.2022	800250409	■
6	green	25	0001.2023	800250609	■
10	red	25	0001.2024	800251009	■
16	grey	25	0001.2025	800251509	■
20	blue	25	0001.2026	800252009	■
25	yellow	25	0001.2027	800252509	■

■ Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>