
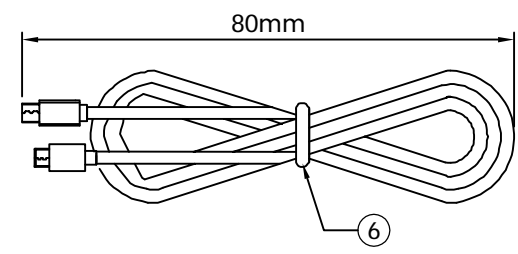


環保物料專用
RoHS compliant

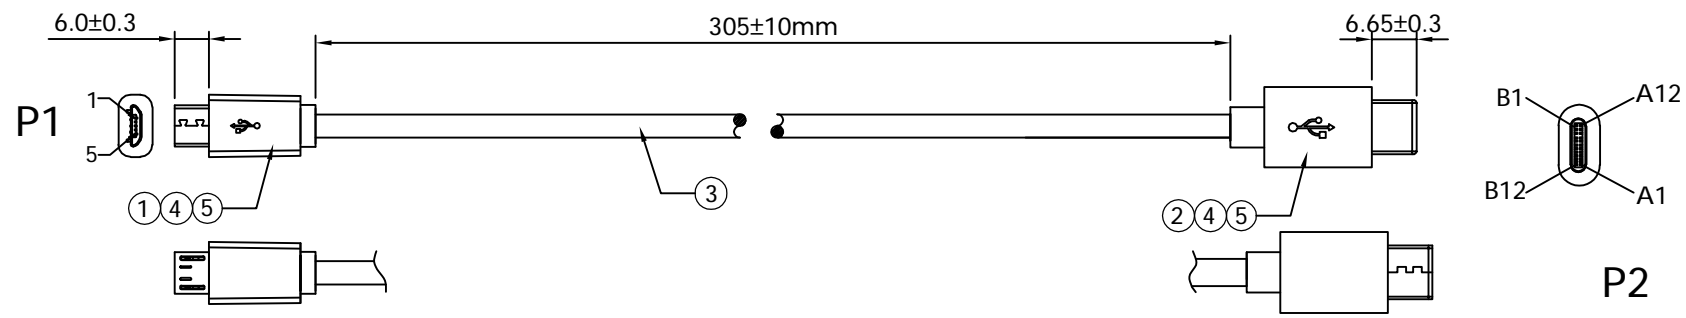


Electrical Character:
100% Open/Short
Contact Resistance: 3 Ohms Max.
Hi-Pot: 200V AC/0.01S
Insulation Resistance: 10M Ohms Min.

Bill Of Material

6	TIE	TIE:Black	SET	1
5	Molding	Outer Over Moulding 35P PVC Color:Black	SET	1
4	Molding	internal mold PE Color:translucent	PCS	
3	CABLE	(10/0.10BC ID:0.75 HDPE White、Green)+(33/0.10BC ID:1.0mm PVC RED、BLACK) 75P PVC OD:3.5mm Jacket Color Black	PCS	
2	CONN	USB 3.1 C Type Male,Gold Flash pin,Solder Type,Natural Insulation,resistor 5.1KΩ	SET	1
1	CONN	Micro USB B Male front five back four, PBT Black Solder Type	SET	1
No.	Part	Material Name and Name	Unit	Qty


Wire Diagram

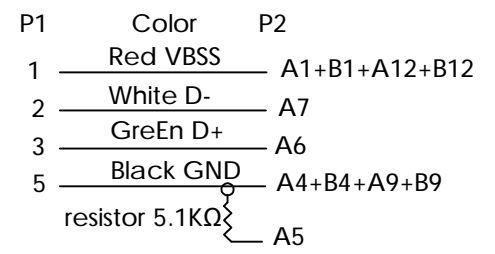

	DESCRIPTION(內容): USB TYPE C TO Micro-USB B Type Male Cable Assembly	DRAWN(製圖): Tom Liu	GENERAL TOLERANCE		REV:	DESCRIPTION	DATE	
		CHECKED(確認): Jack Wu	LINEAR	ANGLES	A/1			
		APPROVAL(核准): Kane He	X.: ±0.50	X°: ±5.0°	UNIT:			1
			X.X: ±0.20	X.X°: ±3.0°	mm			2
PART NO: (料號) CBUSB-CM-MCBM-305	X.XX: ±0.15	X.XX°: ±2.0°	SHEET:	3				
DWG NO(圖號): KWRD180328-092	X.XXX: ±0.10	X.XXX°: ±1.0°	1/2	4				

A4

SCALE(比例):
1:XX



PART NO:
(料號) CBUSB-CM-MCBM-305
DWG NO(圖號): KWRD180328-092

DRAWN(製圖):
Tom Liu
CHECKED(確認):
Jack Wu
APPROVAL(核准):
Kane He

GENERAL TOLERANCE
LINEAR ANGLES
X.: ±0.50 X°: ±5.0°
X.X: ±0.20 X.X°: ±3.0°
X.XX: ±0.15 X.XX°: ±2.0°
X.XXX: ±0.10 X.XXX°: ±1.0°

REV:
A/1
UNIT:
mm
SHEET:
1/2

REV
1
2
3
4

DESCRIPTION
ORIGINAL

DATE
Mar-28-2018