

	т		Q	п		т		D		0	
4		Z'	V Thread	ØS							
ω				Keying Show	vn as example					LAYOU"	T SHOWN AS EXA
	CHARACTERISTICS				Connecto	r dimension	]				
	Standard : Based on N		s III		Dim ØS	Nominal 35.7 Max	-				
N	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souria	: 500 Mating cycle	r Alloy 0.8µm minimu es	m	Z' VV THREAD	31.5 Max M25x1-6g					ne Products whic
	-Temperature Range	: -65°C to +200°C						A 17-1	10-2016	irst Release	
	-Salt Spray -Mass	: 2000 hours : 31.3 g ± 10%							DATE	Latest modification - b Date:	ру
								тіті	LE		Compos
<b>-</b>	BASIC SERIES: SHELL TYPE : Plug wit		5 - 17	M 75 P C				SCALE NA			General linear Tolerances: ±
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : C   SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings)								RIAU	WWW.SOURIAU.CO	
	PLATING : M =	Nickel				CONTACT LAY		FORMAT		ς	OURIAU
				I				A3			BD517M7
L	Н		G	F		E	1	D		С	
						l l	1				

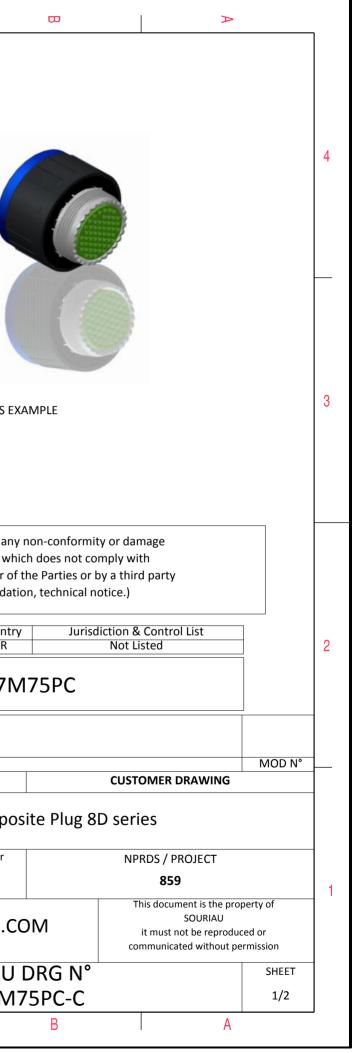

-	Ŧ	Q	нт — — — — — — — — — — — — — — — — — — —	m		0
4		Contact Layout 75				
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				
ယ						
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either or (professional recommendat
N					A 17-10-20	Countr FR PN: 8D517N
					ISS DATE Designed By: TITLE	Date:
					SCALE NA SOURIA	U WWW.SOURIAU.C
	Н	G	F	E	D A3	8D517M

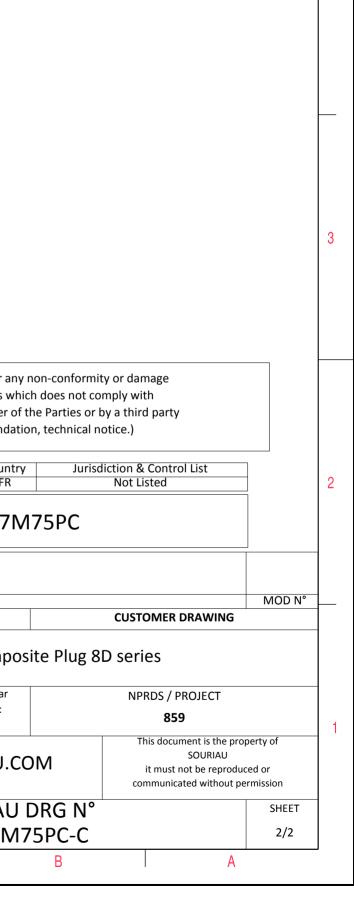

4