



(1)

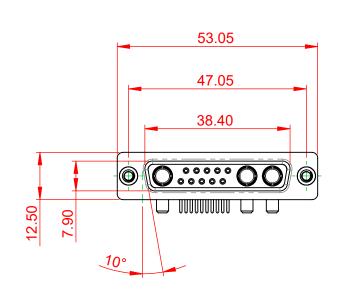



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED


OPERATING TEMPERATURE:

.XX ±0.13

.XXX ±0.05


POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:



Γ	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
YOUR CONNECTION T	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-13W3250-3T2		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-13W	3250-3T2	1

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. -55°C ~ 125°C

