
E E E E E E E E E E E E E E E E E E E					
	Ŧ	۵	П	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Olive drab Cadmium			
-Insulator		: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability		: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	65°C to +175°C			
	-Salt Spray	: 500 hours			

: 11.27 g ± 10%

8D 0

G

11

W

04

Ρ

F

N L

Connector	dimension		
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 11-04

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : N



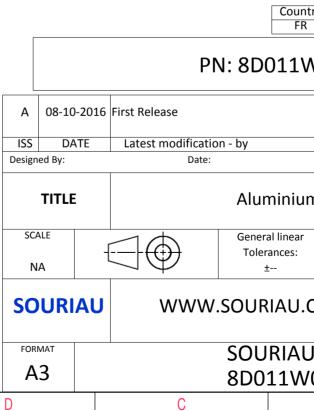

	₿ ▶					
		3				
AS EXA	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
untry FR	y Jurisdiction & Control List Not Listed				2	
.W04PNL						
				MOD N°		
		CUSTOMER	RAWING		-	
um	n Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
/VU	V04PNL-C 1/2 B A					
D I A						

_	Ŧ	۵	п –	m	D	0
		Contact Layout				Panel Cuto
4	-×	$ \begin{array}{c} $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numt size no. cont 11 -4 4	X-axis (mm) Y-axis (mm) + 0.65 (1.65) .065 (1.65) + 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65) - 0.65 (1.65)]			ØT
ω						Dim ØA ØAA R1 ØT
	\vdash					SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o
N						(professional recommenda Count FR PN: 8D011V
					A 08-10-20 ISS DATE Designed By:	016 First Release
					SCALE	Aluminiun General linear Tolerances:
<u> </u>					SOURIA	U WWW.SOURIAU.C
		1	1		FORMAT A3	SOURIAU 8D011W
	Н	l G	l F	E \	D	C

