T	Ω (<u>п</u>	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

17

W

20

А

F

Е


CONNECTO	r dimension	
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	26.97	
R2	24.61	
S	33.3±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M25x1-6g	


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-20



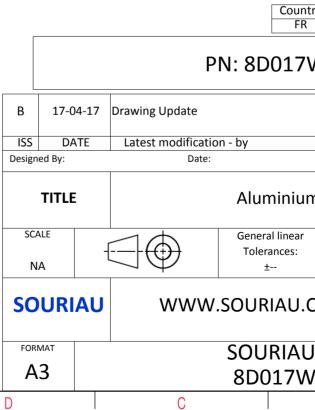

Φ	≻				
		4			
S EXAMPLE		3			
any non-conformit which does not context of the Parties or b dation, technical not intry Jurisd R 7W20AE	mply with by a third party	2			
	MOD	N°			
customer drawing um Receptacle 8D series					
ar	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° W20AE-C	SHEE 1/2	Т			
В	A				

ſ	т	۵	н п	m	D	0
4	(Contact Layout			22 -	SQUARE FLANGE RECEPTACLE (TYPE 0)
_		4#12 16#22D 17-20	7		¥	
ω	Ctc A B C D 1 2 3 4 5	X Y 0 5.51 3.17 0 0 -5.51 -3.17 0 4.16 7.06 4.29 4.29 7.11 4.03 8.05 1.4 8.05 -1.4				Max. thickness panel for receptacle: Type 0: front m
2	6 7 8 9 10 11 12 13 14	7.11 -4.03 4.29 -4.29 4.16 -7.06 -4.16 -7.06 -4.29 -4.29 -7.11 -4.03 -8.05 -1.4 -7.11 4.03 -7.11 4.03				SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend Coun FR PN: 8D017
	15 16	-4.29 4.29 -4.16 7.06			B 17-04-17 ISS DATE Designed By:	7 Drawing Update Latest modification - by Date:
_ -					SCALE NA SOURIAU	Aluminiu General linear Tolerances: ± J WWW.SOURIAU.
	Н	G	F	E	FORMAT A3 D	SOURIAU 8D017V C

