
	т	m		D	0		₩	Þ	
	S S								
	Keying Shown a	as example				AYOUT SHOWN AS EXAMP	LE		
CHARACTERISTICS	-, 31								
-Standard : Based on MIL-DTL-38999 Series III	F	Connector dimension Dim Nomina	1						
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer		ØS         41.7 Mai           Z'         31.5 Ma           VV THREAD         M31x1-6	x		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
<ul> <li>Contact Plating : Gold over copper Alloy 0.8μm minimum</li> </ul>						Country FR	Jurisdiction & Control L Not Listed	List	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					PN: 8D521M41HD				
-Temperature Range : -65°C to +200°C				A 08-	10-2016 First Release				
-Salt Spray : 2000 hours				ISS DATE Latest modification - by		MOD N	N°		
				Designed By			CUSTOMER DR		
				тіт	TITLE Composite Plug 8D series				
BASIC SERIES: 8D 5 - 21 M SHELL TYPE : Plug with RFI Shielding	41 H D			SCALE		General linear Tolerances: ±	NPRDS / PRC <b>859</b>	DJECT	
CONTACT TYPE : Standard Crimp Contact			DRIENTATION : D	SOUI	RIAU WWW	V.SOURIAU.COM	S it must not	nt is the property of OURIAU : be reproduced or	
SHELL SIZE : 21		CONTACT TYPE : PIN		FORMAT				d without permission	
PLATING : M = Nickel		CONTACT	T LAYOUT : 21-41	A3		SOURIAU DR 8D521M41F		SHEET	
								-14	

	т	പ	п –	m		<b>O</b>
		Contact Layout				
4		+Y 7 HOLES				
	<	31 - 337 - 41' - 13 HOLES				
	Ň					
			7			
ω		Insert arrangement 21-41           ber of         Size         Service         Contact         Supersedes           tacts         contacts         rating         location         Iocation           11         20         I         All         MS20055-41	-			
			_			
						SOURIAU shall not be liable for a
						due to a use of the Products v the Specifications issued by either
						(professional recommend
						Coun
N						FR
						PN: 8D521
						16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Comp
						Comp
					SCALE	General linear Tolerances:
<u> </u>					NA	
					SOURIA	U WWW.SOURIAU.
					FORMAT A3	SOURIAL
		<u> </u>	F	r T		8D521N
	Н	G	l F	I E	D	C

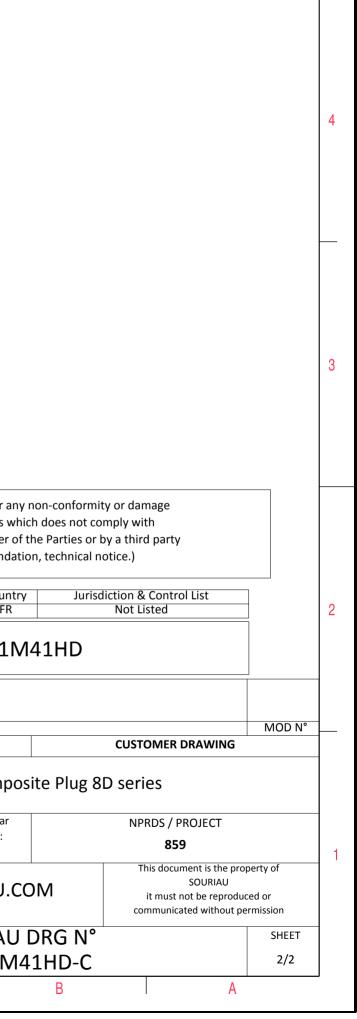

 $\triangleright$ 

σ