


	Ξ		A					
	C				4			
S EXA	AMPLE				3			
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third part			2			
				MOD N°				
ess S	customer drawing ess Steel Plug 8D series							
ar :	NPRDS / PROJECT 859							
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission								
	DRG N° 1BB-C			SHEET 1/2				
	В		А		1			

r	Ŧ	۵	н <b>г</b>	m		0
		Contact Layout				
4	_	$\begin{array}{c} & & \\$				
	Contact position ID  Loca X-axis (mm)    A  +.128 (3.25)    B  +.289 (7.34)	Y-axis (mm)  Contact position ID  X-axis (mm)  Y-axis    + 385 (9.78)  M  - 289 (7.34)  + 285 (7.24)				
ω	C  +.336 (9.80).    D  +.400 (10.16).    E  +.326 (8.33).    F  +.183 (4.65).    G  +.000 (10.00).    H 183 (4.65).    J 328 (8.33).    K 400 (10.16).    L 386 (9.80).    Shell  no.  con	+ 285 (7.24)  N  -128 (3.25)  +385 (9.78)    + 123 (3.12)  P  +000 (0.00)  +246 (6.22)    -065 (1.65)  R  +160 (4.06)  +144 (6.27)    -239 (6.07)  S  +214 (5.44)  -035 (0.89)    -362 (9.19)  T  +094 (2.39)  -194 (4.93)    -362 (9.19)  V  -214 (5.44)  -035 (0.89)    -239 (6.07)  W  -160 (4.06)  +146 (4.71)    -239 (6.07)  W  -160 (4.06)  +146 (4.371)    -239 (6.07)  W  -160 (4.06)  +146 (3.71)    -055 (1.65)  X  +000 (0.00)  +000 (0.00)    +123 (3.12)       tacls  contacts  Stervice  Contact  Supersedi    tacls  contacts  rating  MS20056-1  16	- - 			
	-					
-						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
					A 07-10-20	PN: 8D523
					ISS DATE Designed By:	Date:
					SCALE	General linear Tolerances:
<b></b>					SOURIA	
					FORMAT A3	SOURIAL
Į	Н	G	F	E	D D	8D523S

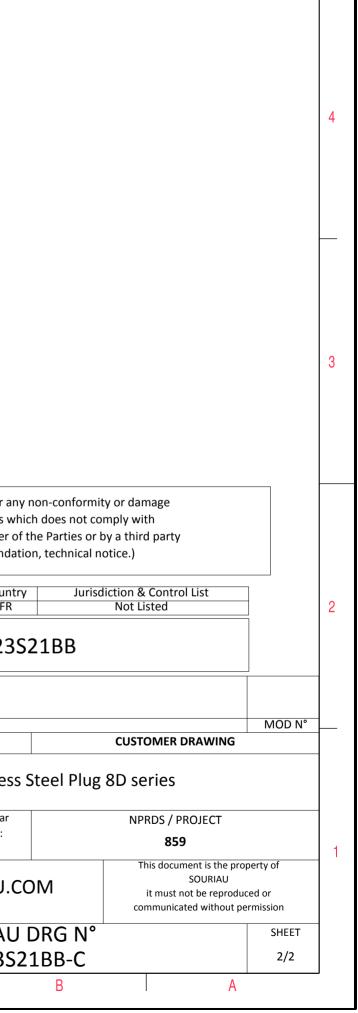

 $\triangleright$ 

σ