
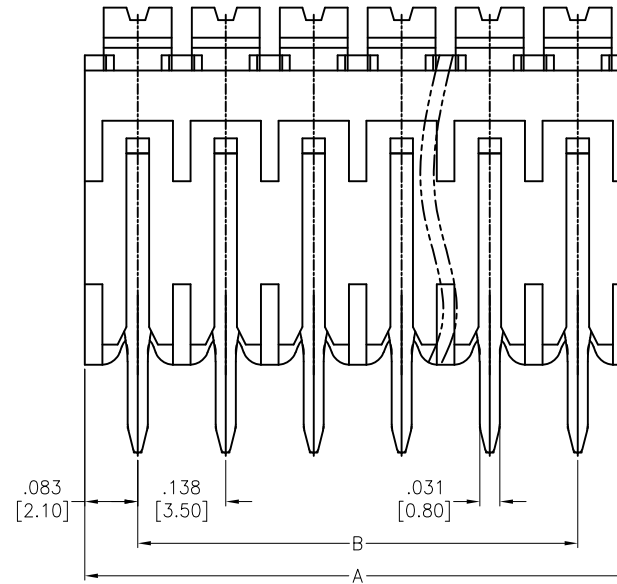
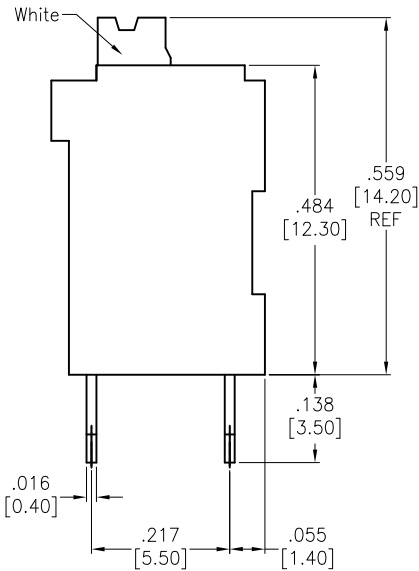
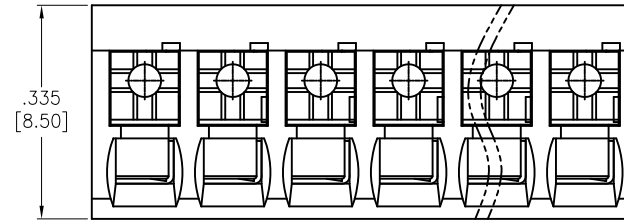


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/16	
A		UPDATE DRAWING	9/30/20	AY/DH

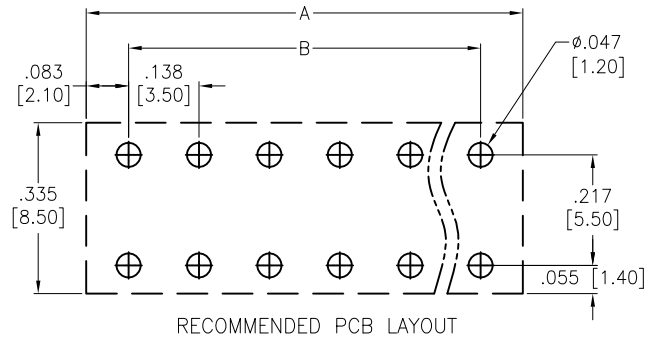

SPECIFICATIONS:

Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contact: Copper Alloy, Tin plated

Electrical:
 Voltage rating: 300V
 Current rating: 10 A
 Withstanding Voltage: 1600 V/1 Min

Mechanical:
 Wire range: 24-16 AWG
 Stripping length: 7~8mm
 Temperature Rating:
 Operating temperature: -40°C to +130°C

ENVIRONMENTAL:
 Lead free, rohs compliant.



Positions: 02 thru 24
 A = .135 [3.50] x No. of Spaces + .165 [4.20]
 B = .135 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	AY	6/2/16	
CHECKED	AT	6/2/16	
APPROVED			

ADAM TECH
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: EURO BLOCK, .135 [3.50] PITCH			
SIZE	PART NO.	REV.	
X	EB142A-XX-A-180	A	
REF:	S00067C	SCALE: NTS	SHEET 1 OF 1