



## MMIC SURFACE MOUNT


# Power Splitter/Combiner

## EP2-5G1+

2 Way-0° 50Ω 12 to 43.5 GHz

### THE BIG DEAL

- Wide bandwidth, 12 to 43.5 GHz
- High isolation, 24 dB typ. at 27 GHz
- Low cost splitter for 5G Application
- Excellent amplitude unbalance, 0.1 dB typ. at 27 GHz
- Good phase unbalance, 4° at 27 GHz
- Small size, 2x2 mm
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: MC1630-1

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### APPLICATIONS

- 5G
- Phased array
- Instrumentation
- Radar
- Satellite communications

### PRODUCT OVERVIEW

Mini-Circuits' EP2-5G1+ is a MMIC 2-way 0° splitter/combiner designed for wideband operation from 24 to 30 GHz supporting many applications requiring high performance across a wide frequency range including phased array radars, 5G applications, as well as instrumentation and more. This model provides excellent power handling up to 0.5W (as a splitter/combiner) with good isolation, and low phase and amplitude unbalance in a tiny 2 x 2 mm 6 lead-QFN package. Manufactured using GaAs IPD technology, the EP2-5G1+ not only provides a repeatable performance, but also a high level of ESD protection.

### KEY FEATURES

Feature	Advantages
Wideband, 12 to 43.5 GHz	Low cost power splitter designed for phased array radars and 5G applications.
High isolation, 24 dB typ. at 27 GHz Excellent power handling, 0.5 W as a splitter / combiner	In power combiner applications, half the power is dissipated internally. EP2-5G1+ is designed to handle 0.5 W internal dissipation as a combiner allowing reliable operation without excessive temperature rise.
Excellent Amplitude unbalance, 0.1 dB typ. at 27 GHz Good phase unbalance, 4° typ. at 27 GHz	Ideal for Applications such as MIMO & phased array radars
Tiny size, 2X2mm QFN package	Tiny footprint saves space in dense layouts while providing low inductance, repeatable transitions, and excellent thermal contact to the PCB.





### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT 25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		12		43.5	GHz
Insertion Loss above 3.0 dB	12-24		1.1	2.0	dB
	24-30		1.3	2.1	
	30-43.5		1.4	2.9	
Isolation	12-24	8	15		dB
	24-30	16	23		
	30-43.5	7	16		
Phase Unbalance	12-24		1.2	11	Degree
	24-30		1.7	13	
	30-43.5		3.0	19	
Amplitude Unbalance	12-24		0.1	0.5	dB
	24-30		0.1	0.7	
	30-43.5		0.2	1.5	
VSWR (Port S)	12-24		1.7		:1
	24-30		1.7		
	30-43.5		1.2		
VSWR (Port 1-2)	12-24		1.4		:1
	24-30		1.5		
	30-43.5		1.6		
Power Handling	As a splitter	12-43.5		0.5	W
	As a combiner	12-43.5		0.5	

1. Tested on Mini-Circuits Test Board TB-EP2-5G1C+

### MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-55°C to 105°C
Storage temperature	-65°C to 150°C

Permanent damage may occur if any of these limits are exceeded.

### PAD CONNECTIONS


Function	Pad Number
SUM PORT	5
PORT 1	1
PORT 2	3
GROUND	Paddle
NOT USED, GROUND EXTERNALLY	2,4,6

### PRODUCT MARKING

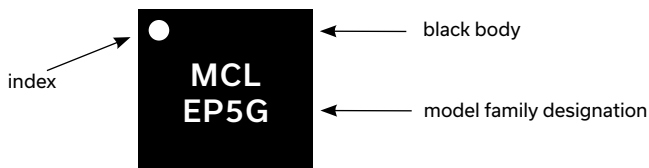

Marking may contain other features or characters for internal lot control

### SIMPLIFIED ELECTRICAL SCHEMATIC

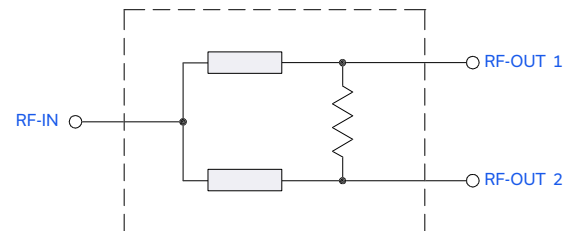




ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)

<b>Performance Data</b>	Data Table Swept Graphs S-Parameter (S3P Files) Data Set (.zip file)
<b>Case Style</b>	MC1630-1 Plastic package, exposed paddle; lead finish: Matte Tin
<b>Tape &amp; Reel</b> Standard quantities available on reel	F66 7" reels with 20, 50, 100, 200, 500, 1000 & 2000 devices
<b>Suggested Layout for PCB Design</b>	PL-668
<b>Evaluation Board</b>	TB-EP2-5G1+ (without connectors) TB-EP2-5G1C+ (with connectors)
<b>Environmental Ratings</b>	ENV82

### ESD RATING

Human Body Model (HBM): Class 2 (Pass 2000V) in accordance with ANSI/ESD STM 5.1 - 2001

### MSL TEST FLOW CHART

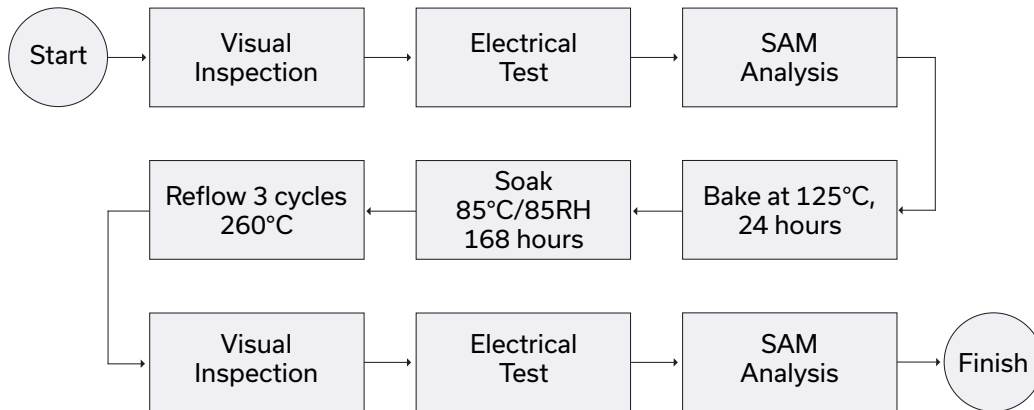

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)