



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

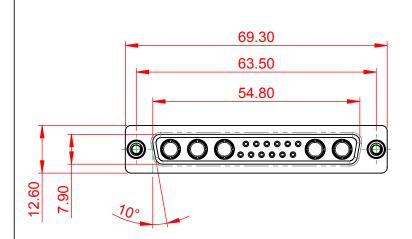



NOTES:


MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19		
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 628-17W5624-4T6		ISSUE	
		PART NUMBER: 628-17W	5624-4T6	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 0 E FOR PLATING

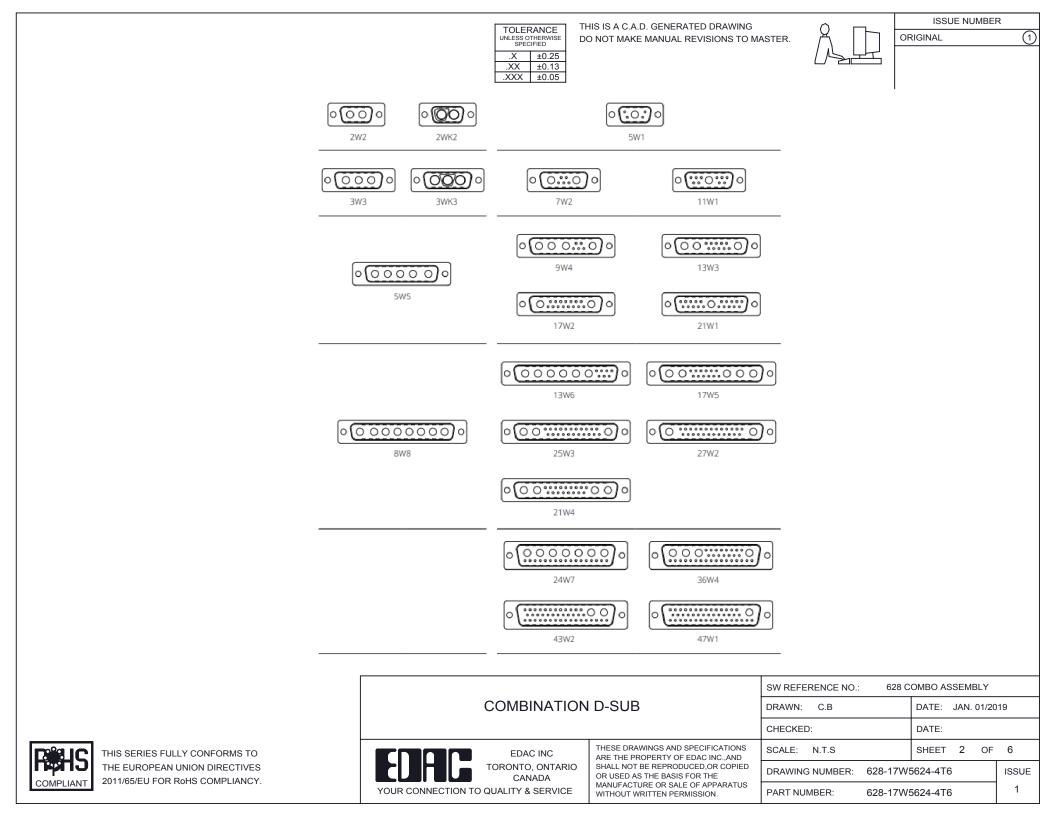

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





21W4 Male/Female




27W2 Male/Female







8W8 Female AX M 31.76 17W2 Male/Female 21W1 Male/Female CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2

5W5 Male



8W8 Male







11W1 Male/Female

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT

	SW REFERENCE NO.: 628 COMBO ASSEMBLY			
COMBINATION D-SUB DRAWN: C.B DATE: JAN. 01/ CHECKED: DATE: JAN. 01/)19			
		CHECKED:	DATE:	
EDAC INC		SCALE: N.T.S	SHEET 3 OF	4
	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 628-17W	′5624-4T6	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 628-17W	/5624-4T6	1





THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25





9W4 Male



25W3 Male



47.02 23.53 14.51 9.70 7.79 김 영



36W4 Female



13W3 Male





20.70 30.50 13.72 16.62 김 목






13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05


9W4 Female

13W3 Female






47W1 Female




17W5 Male



47W1 Male







		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20)19
			CHECKED:	DATE:	
CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: N.T.S	SHEET 4 OF	4
ON DIRECTIVES S COMPLIANCY.	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-17	V5624-4T6	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-17	V5624-4T6	1



THIS SERIES FULLY CO THE EUROPEAN UNION 2011/65/EU FOR RoHS C







17W5 Female