


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

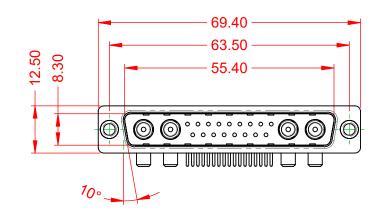




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	40A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

IT)

-55°C ~ 125°C

ACT

1000V AC rms



		SW REFERENCE NO.: 629 C	OMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA EDAC INC TORONTO, ONTARIO CANADA EDAC INC TORONTO, ONTARIO CANADA EDAC INC TORONTO, ONTARIO CANADA	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 629-21W4	4240-4N1	ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-21W4	1240-4N1	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

