


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05


DO NOT MAKE MANUAL REVISIONS TO MASTER.

THIS IS A C.A.D. GENERATED DRAWING





(1)



11.94 20.33 Θ \odot

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED


OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

-55°C ~ 125°C

1000V AC rms



| | COMBINATION D-SUB | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | |
|--|--------------------------------------|--|--------------------------------------|--------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/2019 | |
| | | | | DATE: | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 630-43W2250-4TC | | ISSUE |
| | | | PART NUMBER: 630-43W | 2250-4TC | 1 |

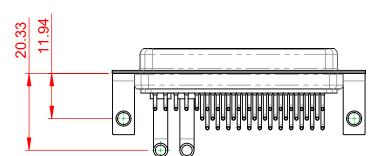

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

