

SUMMARY

Wires

| | |
|-------------|----|
| Low voltage | 10 |
| Fluidic | 1 |

| | |
|------------------|----------------------------------|
| Series | 2P |
| Termination type | Female crimp |
| IP rating | 50 |
| AWG wire size | 0.00 - 0.00 |
| Cable Ø | 0.00 - 0.00 mm |
| Status | active |
| Matching parts | CAB.015.NLC.C92A |



Image is for illustrative purpose only

Download

- [Request a quote](#)
- [Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | CK*: Fixed receptacle with two nuts (back panel mounting) |
| Keying | No keying |
| Housing Material | PSU (Polysulfone), black |
| Weight | 8.65 g |

Performance

| | |
|---------------|-------------------------------|
| Configuration | 2P.015 : 1 Fluidic, 10 Low V. |
| Insulator | L: PEEK for solder contacts |
| Rated Current | 5 Amps |

Specifications


Test voltage (kV rms) Contact-contact: 1.15
Air clearance min.: 0.9 mm
Creepage distance min.: 0.9 mm

Others

Endurance (Shell): >1000 mating cycles
Temp (min / max): -50° C / +150° C

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

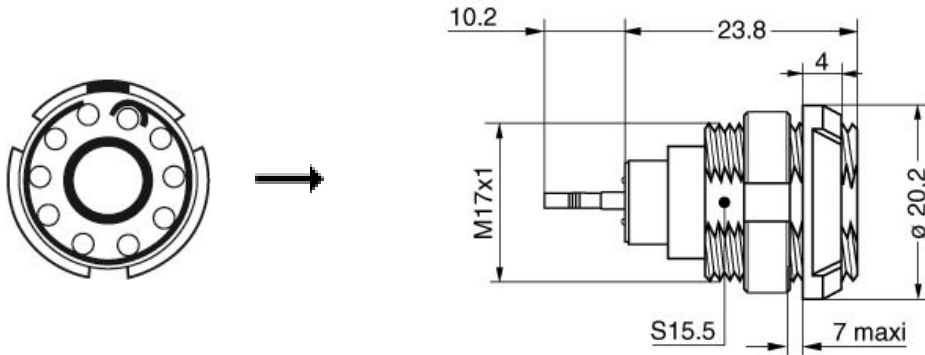

No keying

Dimensions

| | N | a |
|-----|------|------|
| mm. | 23.8 | 10.2 |
| in. | 0,94 | 0,40 |

RECOMMENDED BY LEMO

Tools

- Crimp Tool: [DPC.91.701.V](#)
Crimp settings: AWG/Selector = 22-24-26/6-5-5
Positionner: [DCE.91.072.BVM](#)
Extractor: [DCC.07.04B.LAG](#)
Replacement contact: EGG.2B.655.ZZM

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.