



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	1

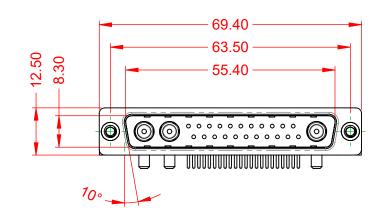




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

WITHSTANDING VOLTAGE:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TE	MPERATURE:	-55°C ~ 125°C
POWER/CO-AX (IF PRESENT)	CONTACT RATING:	20A (CURRENT)
SIGNAL CONTA	CT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTA	CT RESISTANCE:	10mΩ MAX.
INSULATOR RE	SISTANCE:	5000MΩ min.

ſ	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
ſ	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-25W3640-2N4		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE	VICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-25W	'3640-2N4	1

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

