

т	۵	п	m	0



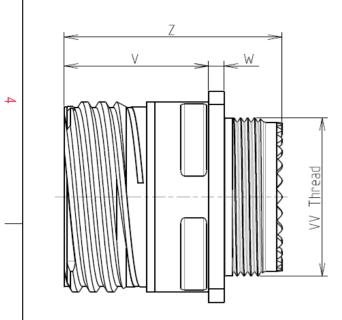

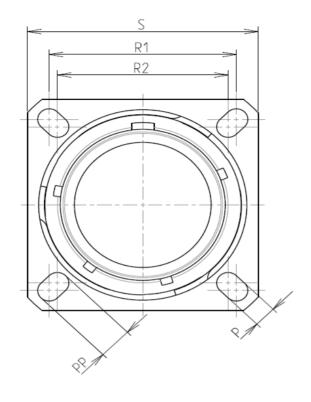

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	- 65°C to +175°C			
-Salt Spray	: 500 hours			

: 14.95 g ± 10%

8D 0

G

11

Ζ

01

S

F

D


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			


ORIENTATION : D

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е



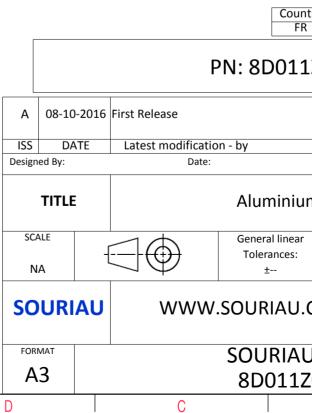

	Φ		A		
)			
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
untry FR	Jurisd	liction & Co Not Listed			2
.1Z01SD					
				MOD N°	
		CUSTOM	ER DRAWING		
um Receptacle 8D series					
ar :			5 / PROJECT 859		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
UDRG N° SHEET					
.Z0	1SD-C B		A	1/2	ļ
	D	I	A		

ŗ		۵	г П	m		0
		Contact Layout				Panel Cutou
4		01			Λ	SQUARE FLANGE RECEPTACLE (TYPE 0)
	Ctc	лини 1 1 # 12 11-01 Х Ү]		۲۵ – ۲۵	ØT.
ω	A	0 0				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of
N						(professional recommendat Countr FR PN: 8D0112
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_ _					SCALE NA	Aluminium General linear Tolerances: ±
	H	G	F	E	FORMAT A3	WWW.SOURIAU.C SOURIAU 8D011Z0
	11	- U				· · · · · ·

