
т	۵	н т	m	O





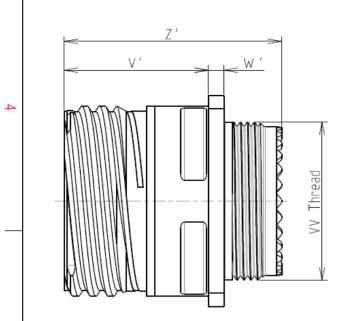

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 39.7 g ± 10%

8D 0

G

19

J

11

S

F

С


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M28x1-6g			


ORIENTATION : C

CONTACT LAYOUT : 19-11

CONTACT TYPE : SOCKET(500 Matings)

Е



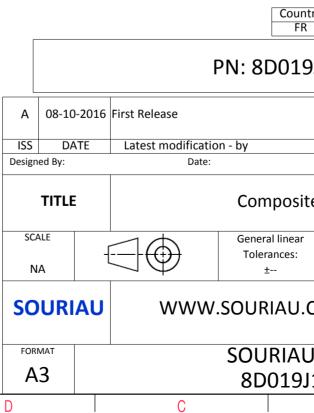

	σ		А				
					4		
AS EXA	EXAMPLE						
· any r	non-conformit	ty or damage					
s whic er of tl idatio	any non-conformity or damage which does not comply with r of the Parties or by a third party dation, technical notice.)						
untry FR	/ Jurisdiction & Control List Not Listed						
L9J1	JJ11SC						
		CUSTOME	R DRAWING	MOD N°			
site l	e Receptacle 8D series						
ar			PROJECT		1		
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°	l		SHEET			
9J1:	1SC-C		Δ	1/2	J		
	В		A				

