
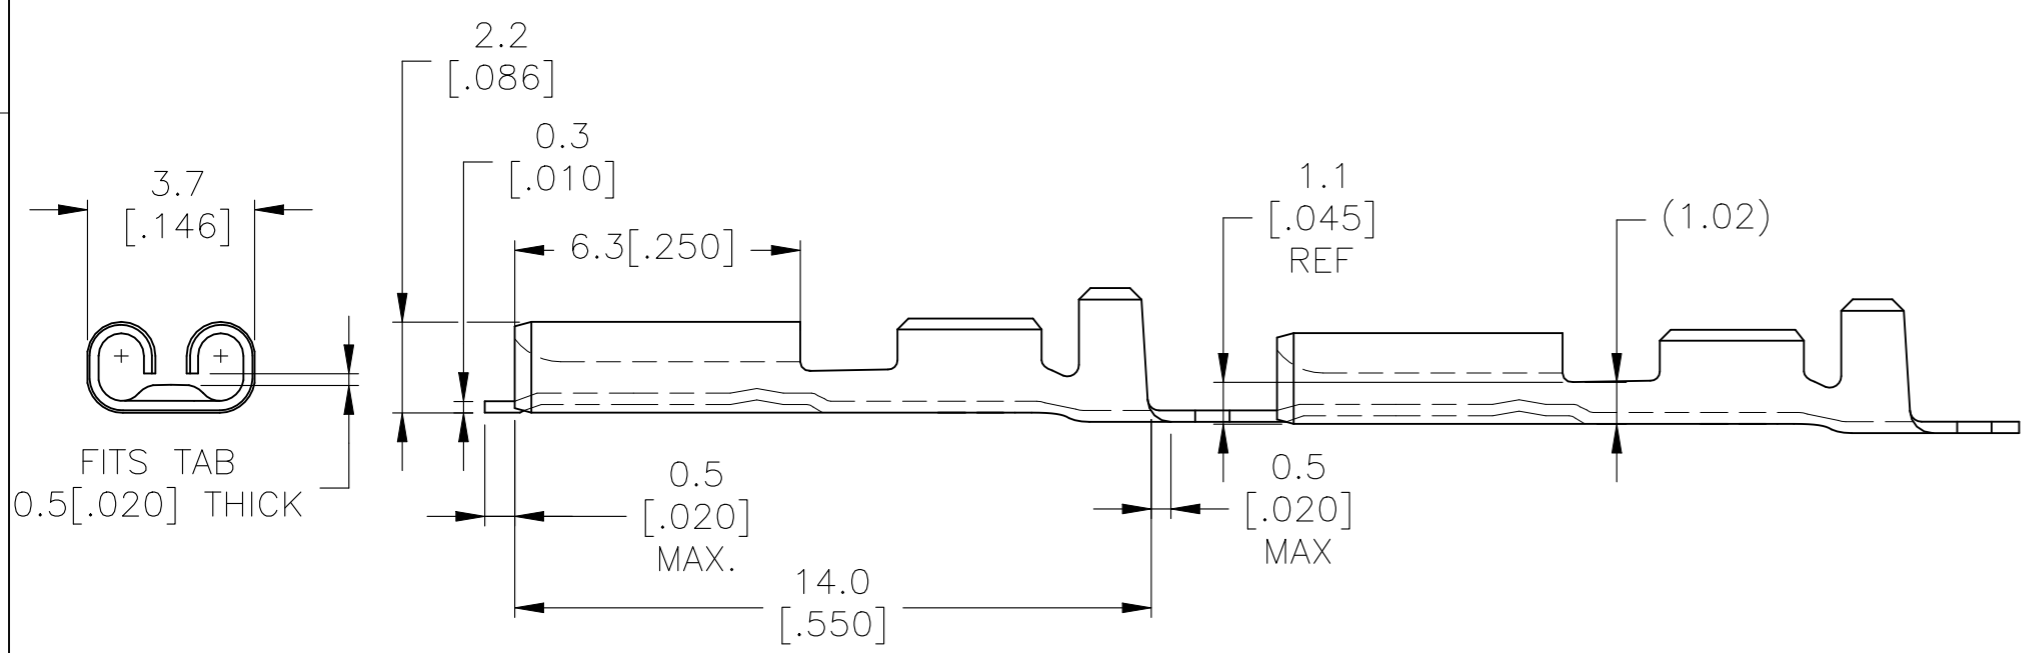


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
G1		REVISED AS PER ECR-22-142763	17JUN2022	FDP	TD

- △1 SPLICE FREE, FOR AMP\_O\_MATOR.
- △2 REELED WITH PAPER LAYER.
- △3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CHAMFER

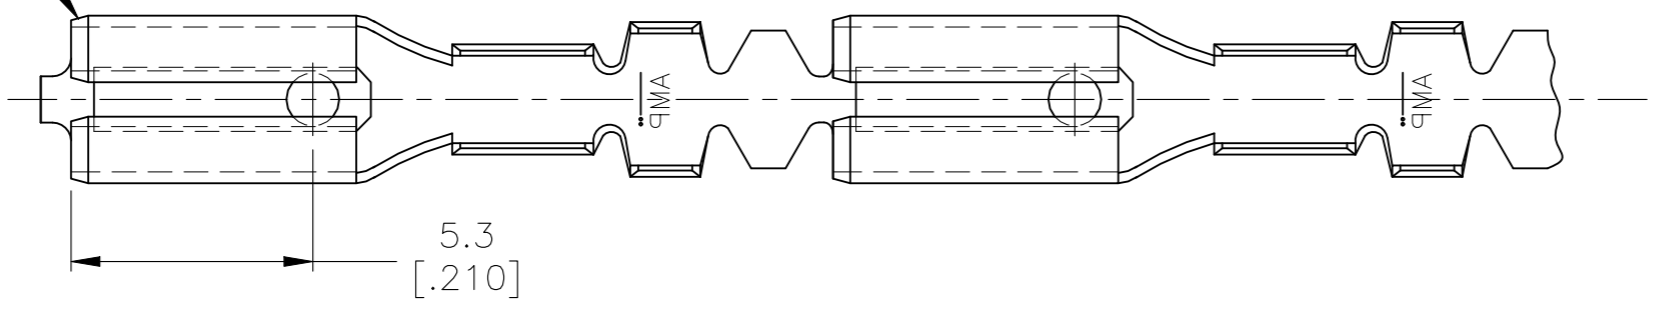

△3	TIN	BRASS	△2	6-160316-4
	TIN-LEAD	PHOSPHORBRONZE		6-160316-3
△3	TIN-LEAD	BRASS		6-160316-2
△3	PRE-TIN HOT DIP	PHOSPHORBRONZE		6-160316-0
△3	TIN	BRASS	△1	5-160316-9
△3	NONE	BRASS	△1	5-160316-8
	GOLD	PHOSPHORBRONZE		5-160316-7
△3	TIN	PHOSPHORBRONZE		5-160316-6
	NONE	PHOSPHORBRONZE		5-160316-5
△3	GOLD	BRASS		5-160316-4
	SILVER	BRASS		5-160316-3
	TIN	BRASS		5-160316-2
	NONE	BRASS		5-160316-1
	FINISH	MATERIAL		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.KESSLER 11-04-94	<b>STE</b> TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK P.BEIJNON		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.V. SOEST	NAME .110 SRS FASTON RECEPTACLE	
0 PLC ± 1.0		PRODUCT SPEC		
1 PLC ± 0.5		APPLICATION SPEC		
2 PLC ± 0.2		WEIGHT	SIZE A3	CAGE CODE 00779
3 PLC ± -			DRAWING NO C-160316	RESTRICTED TO
4 PLC ± -			SCALE 6:1	SHEET 1 OF 1
ANGLES ± 1°			REV G1	
FINISH			CUSTOMER DRAWING	
WIRE RANGE :	INSUL-RANGE :	MATERIAL		
0.3-0.56mm <sup>2</sup> (22-20 AWG)	∅ 1.0-2.0 (∅ .050-.080)	-		