





ISSUE NUMBER	
ORIGINAL	(1)

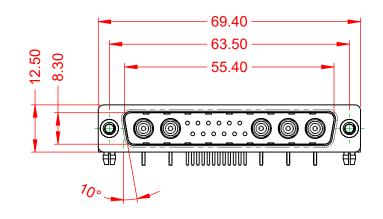




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min.


.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE: 75Ω (IMPEDANCE)


1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINATIC			DATE: JAN. 01/20	19	
			DATE:		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO		DRAWING NUMBER: 629-17W	5240-7TB	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-17W	5240-7TB	1	



COMPLIANT





**OPERATING TEMPERATURE:** 

-55°C ~ 125°C

