





ISSUE NUMBER	
ORIGINAL	1

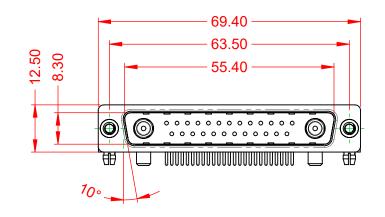




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:

1000V AC rms



	SW REFERENCE NO.: 629 COMBO ASSEMBLY								
CO			DRAWN: C.B		DATE: JAN. 01/2019		19		
			CHECKED:		DATE:				
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		SCALE:	(IN C.A.D. 1:1)	SHEET	1	OF	2
		DRAWING NUMBER: 629-27W2240-4T3				ISSUE			
YOUR CONNECTION TO QUAL			PART NUM	IBER:	629-27W2	240-4T3			1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

