

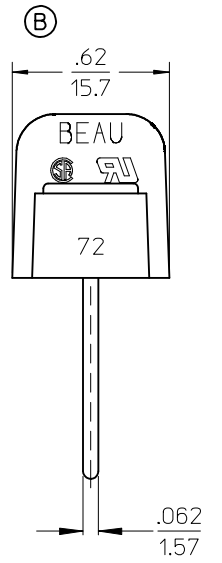


PTH PATTERN

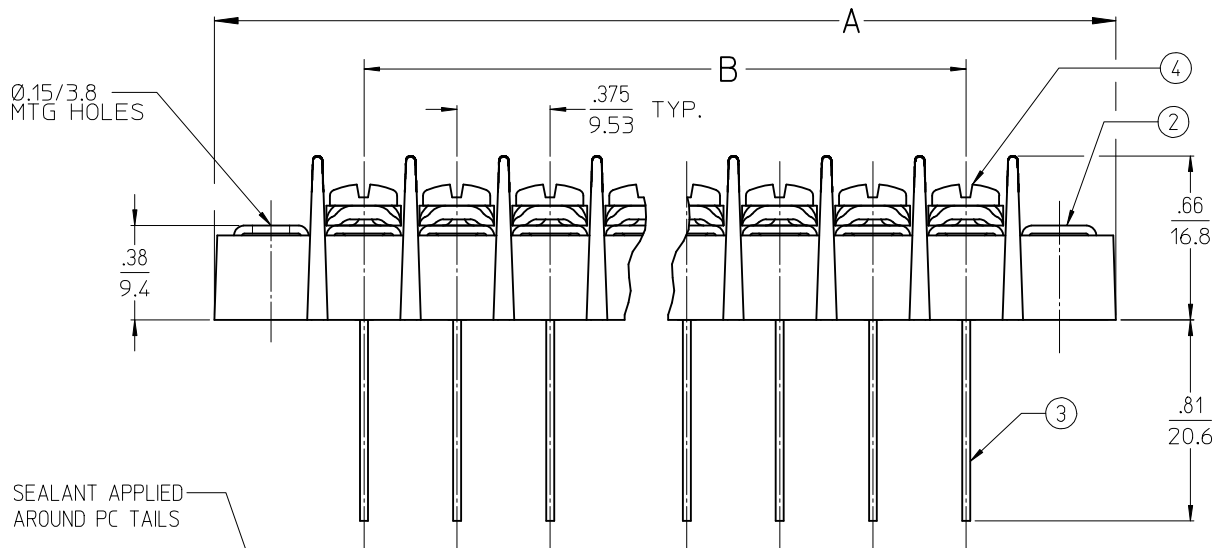

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISH: SEE TABLE
 3. ELECTRICAL SPECS:
MAX VOLTAGE: 300V (-50 OPT, 12 AWG)
MAX CURRENT: 25A
 4. PRODUCT SPEC: PS-38710-001
 5. SCREW TIGHTENING TORQUE: 12 IN LBS. (MAX)
 6. WIRE STRIP LENGTH: .31 (7.8mm)
 7. WIRE RANGE: 22 TO 12AWG
 8. PART IS RoHS COMPLIANT
 9. DIMS. SHOWN ARE FOR REFERENCE ONLY
 10. XX REFERES TO NUMBER OF POLES

SEALANT APPLIED AROUND PC TAILS

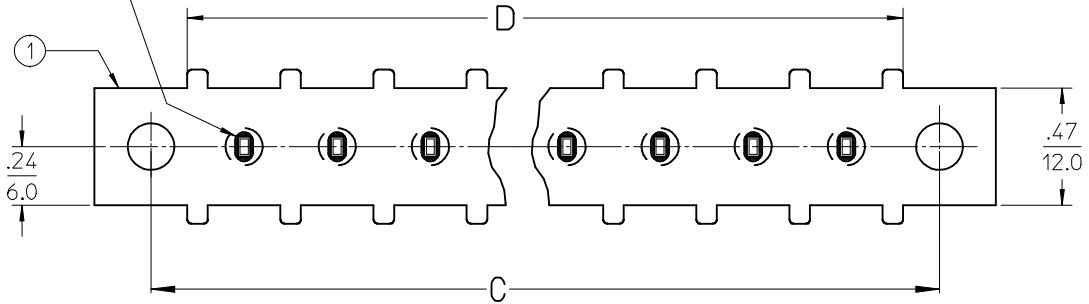

POLES	ASSY. NO.	ENG NO.	A IN/mm	B IN/mm	C IN/mm	D IN/mm
08	387291066	72708-50-81-SP398	3.83/97.3	2.625/66.68	3.375/85.73	3.08/78.3
12	387291067	72708-50-81-SP399	5.33/135.4	4.125/104.78	4.875/123.83	4.58/116.4

TABLE

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	XX	SCREW & WASHER, #6-32X.25, PAN, PH/SL -50	STEEL	ZN CLEAR CHROMATE
3	XX	TERMINAL, WW EXTRA LONG	BRASS	TIN PLATE
2	2	MOUNTING PLATE	BRASS	NICKEL PLATE
1	1	INSULATOR, SR, PC	PBT	BLACK

REV'D NOTES, ADD END VIEW

EC NO: IPG2017-0467
 2016/11/10
 DRW:RSTONE
 2016/11/14
 CHK:RUPERT
 2016/11/30
 APPR:WOODMAN

QUALITY SYMBOLS
 ▽=0
 ▽=0

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .010	± .0010
2 PLACES	± .013	± .0013
1 PLACE	± .030	± .0030

ANGULAR ± 2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM

SCALE: 2:1

DESIGN UNITS: INCH

THIRD ANGLE PROJECTION

DRAWN BY: RSTONE DATE: 2014/07/18

CHECKED BY: B ARDEN

APPROVED BY: JFMURPHY DATE: 2014/08/02

TITLE: .375 SR BTS WW-81 SPECIAL WITH SEALED TERM. HOLES

MATERIAL NO. SEE CHART

DOCUMENT NO. SD-38729-074

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION