

Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 5 mm, Colour: Grey

**RAL:** 7032

### Business data

Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	6.6 g
Weight per piece (including packaging)	7.1 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Prio-Article	1296.2
Product description	Feed-through terminal

1296.6

RK 2,5 GR

---

## Technical data

---

### Dimensions

---

Length	48 mm
Width	5 mm
Height TS 35/7.5	47 mm
Height TS 32	51.5 mm

---

### Ratings

---

Rated voltage	800 V
Rated current	24 A
Rated cross-section	2.5 mm <sup>2</sup>
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	0.77 W

---

1296.6

RK 2,5 GR

## Technical data

### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	12
Stripping length	7 mm
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

### Further technical data

Mounting type	Mounting rail TS 35/7.5 and TS 32
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	1
End plate required	✓
Number of test pick-off options	1

# Data sheet

1296.6

RK 2,5 GR

---

## Technical data

---

### Print

---

Colour	Grey
--------	------

---

### Environmental Product Compliance

---

REACH Conform	yes
---------------	-----

---

REACH Reference date	2021-07-08
----------------------	------------

---

REACH Candidate Substance Note	No
--------------------------------	----

---

RoHS Conform	yes
--------------	-----

---

1296.6

RK 2,5 GR

---

## Approvals

---

### CSAus approval

---

CSAus File Number	042110_0_000
CSAus approval	UL 1059
CSAus approval granted	yes

---

### UL Recognized

---

UL File Number	E95701
UL approval	UL 1059
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	20 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	20 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	12
UL torque	5.3 Lb In
UL wire material	Cu
UL factory wiring	yes
UL field wiring	yes
UL Recognized	yes

---

1296.6

RK 2,5 GR

---

## Approvals

---

### cUL Recognized

---

cUL File Number	E95701
cUL approval	C22.2 No 158
cUL Usegroup B: rated voltage	600 V
cUL Usegroup B: rated current	20 A
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	20 A
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	12
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	12
cUL torque	5.3 Nm
cUL wire material	Cu
cUL Recognized	yes



### Standards and regulations

---


EAC approval	TR ZU 004/2011
EAC approval granted	yes

---

## Media

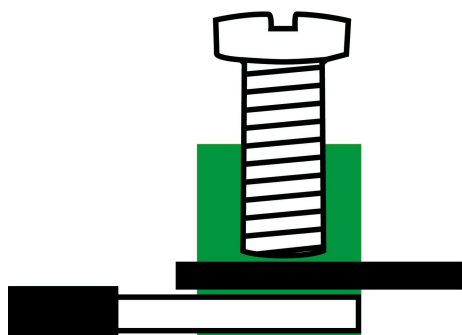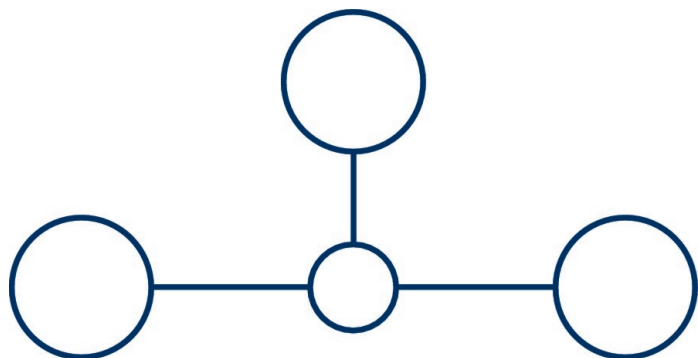

**M2.5**



# Data sheet

1296.6

RK 2,5 GR



---

## Accessories

---



1296.6

RK 2,5 GR

## Cover



Cover, Length: 20 mm, Width: 24 mm,  
Colour: Yellow

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2713.0	AD 4/20/B/E YE	4044211054540	50 ST



Cover, Length: 26.5 mm, Width: 5 mm,  
Colour: White

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2962.0	AD 1/5 WH	4044211056919	50 ST



Cover, Length: 20 mm, Width: 24 mm,  
Colour: Yellow

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2712.0	AD 4/20/B YE	4044211054533	50 ST

Creation date 15.12.2021 13:28:56  
Subject to technical changes

1296.6

RK 2,5 GR

---

## Cover

---



Cover, Length: 26.5 mm, Width: 5 mm,  
Colour: Yellow

---

### General order data


Product number:	Article name	GTIN (EAN)	Packaging unit
2952.0	AD 1/5/B YE	4044211056803	50 ST

---

---

## End plate

---

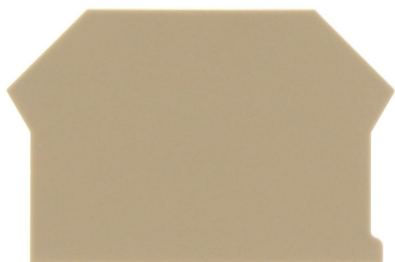

End plate, Width: 1.5 mm, Colour: Beige

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2001.2	AP 2,5-10 BG	4044211047979	50

---


1296.6

RK 2,5 GR

---

## End stop

---



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

---

## General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST BG	4044211055547	50

---

1296.6

RK 2,5 GR

## Cross-connector



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 19.3 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2569.0	Q 4	4044211053598	20 ST



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 49.9 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2570.0	Q 10	4044211053604	10 ST



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 14.2 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2568.0	Q 3	4044211053581	50 ST


1296.6

RK 2,5 GR

---

## Cross-connector

---



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 9.1 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

---

### General order data


Product number:	Article name	GTIN (EAN)	Packaging unit
2567.0	Q 2	4044211053574	50 ST

---

---

## Quick marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 ST

---

1296.6

RK 2,5 GR

## Screwdriver



Screwdriver with bare blade, Colour: Black-grey

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 ST

## Test adapters



Test adapter, Length: 37.3 mm, Pitch size: 5 mm, Colour: Beige

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2812.0	TA 5/1/ST	4044211055394	10 ST

1296.6

RK 2,5 GR

## Insulation plate




Insulation plate, Colour: Beige

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2566.2	TRS 3 BG	4044211053567	100 ST

## Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2002.2	TW 2,5-10 BG	4044211048044	50