

**Mounting Option** 

02-.128 (3.25) Dia. Mounting Holes

## **Contact Detail**

524-P.C. Tail .018 Sq.(0.46 Sq.) - Tail LG=.175(4.45) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

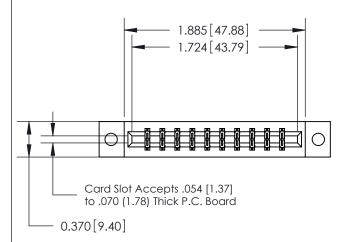

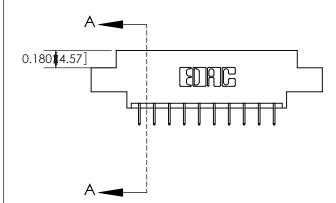

## **See Accompanying Page for:**


- Bend Detail
- Mounting Options
- Features and Specifications

THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

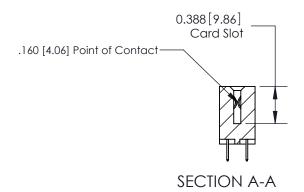

| Part Number: 333-020-524-802   |   | ACAD REFERENCE NO. 333 ENG MASTER |         |           |  |
|--|---|-----------------------------------|---------|-----------|--|
|  |   | DRAWN: J.LEE                      | DATE: O | CT. 14/09 |  |
|  |   | CHECKED:                          | DATE:   |           |  |
| EDAC INC   | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND | SCALE: NTS                        | SHEET   | 1 OF 4    |  |
| TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE |   | DRAWING NUMBER                    |         | ISSUE     |  |
| YOUR CONNECTION TO QUALITY & SERVICE   | MANUFACTURE OR SALE OF APPARATUS                                  | 333 Assembly                      |         | 1         |  |

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



| 333 Series Cara Eage Connector       |  | ACAD REFERENCE NO. 333 ENG MASTER |                  |        |  |
|--------------------------------------|--|-----------------------------------|------------------|--------|--|
|                                      |  | DRAWN: J.LEE                      | DATE: OCT. 14/09 |        |  |
|                                      |  | CHECKED:                          | DATE:            |        |  |
| EDAC INC                             |  |                                   | SHEET :          | 2 OF 4 |  |
| TORONTO, ONTARIO                     | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER                    |                  | ISSUE  |  |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS   | 333 Assembly                      |                  | 1      |  |

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

DRIGINAL

1



|                  | 333 Series Card Edge Connector   |         | ACAD REFERENCE NO. 333 ENG MASTER |         |           |        |
|------------------|--|---------|-----------------------------------|---------|-----------|--------|
| Mounting Options |  | DRAWN:  | J.LEE                             | DATE: O | CT. 14/09 |        |
|                  | Moorning Ophons  |         | CHECKED                           | ):      | DATE:     |        |
|                  | EDAC INC THESE DRAWINGS AND SPECIFICATIONS   |         | SCALE:                            | NTS     | SHEET :   | 3 OF 4 |
|                  | TORONTO, ONTARIO CANADA  YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PERMISSION.  ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING | NUMBER                            |         | ISSUE     |        |
|                  |  | 3       | 33 Assembly                       |         | 1         |        |

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector    | ACAD REFERENCE NO. 333 ENG MASTER         |
|-----------------------------------|---|
| Features and Specifications       | DRAWN: J.LEE DATE: OCT. 14/09             |
| realities and specifications      | CHECKED: DATE:                            |
| EDAC INC THESE DRAWINGS A         | ND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4 |
| IORONIO, ONIARIO SHALL NOT BE REF | PRODUCED, OR COPIED DRAWING NUMBER ISSUE  |
|                                   | SALE OF APPARATUS 333 Accombly 1          |