


T O	т m		0	Φ		
R 22.6 Max (rel u) (rel u) (re			<image/> <image/>	AS EXAMPLE		
	Keying Shown as example					
-Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal					
-Shell Material: Aluminium-Shell Plating: Black Zinc Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	A 44.5±0.3 B 30.15+0.1/-0.15 R 32.5Max S 41.3±0.4 W 2.2+0.9/-0.1 VV THREAD M25x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List			
-Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories				^{FR} 17Z06AD	Not Listed	
-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 01-10-201	L6 First Release			
		ISS DATE Designed By:	Latest modification - by Date:		CUSTOMER DRAWING	
		TITLE	Aluminium Receptacle 8D series			
BASIC SERIES: 8D 7 - 17 Z 06 SHELL TYPE : Jam nut Receptacle	A D	SCALE	General lin Toleranc ±	near	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact	ORIE		J WWW.SOURIA		This document is the property of SOURIAU	
SHELL SIZE : 17	CONTACT TYPE : PIN(5		SOURIAO VV VV.SOURIAO.COIVI it must not be reproduced or communicated without permission			
PLATING : Z = Black Zinc Nickel	CONTACT LAY	YOUT : 17-06 FORMAT A3		AU DRG N° 7Z06AD-C	SHE 1/	

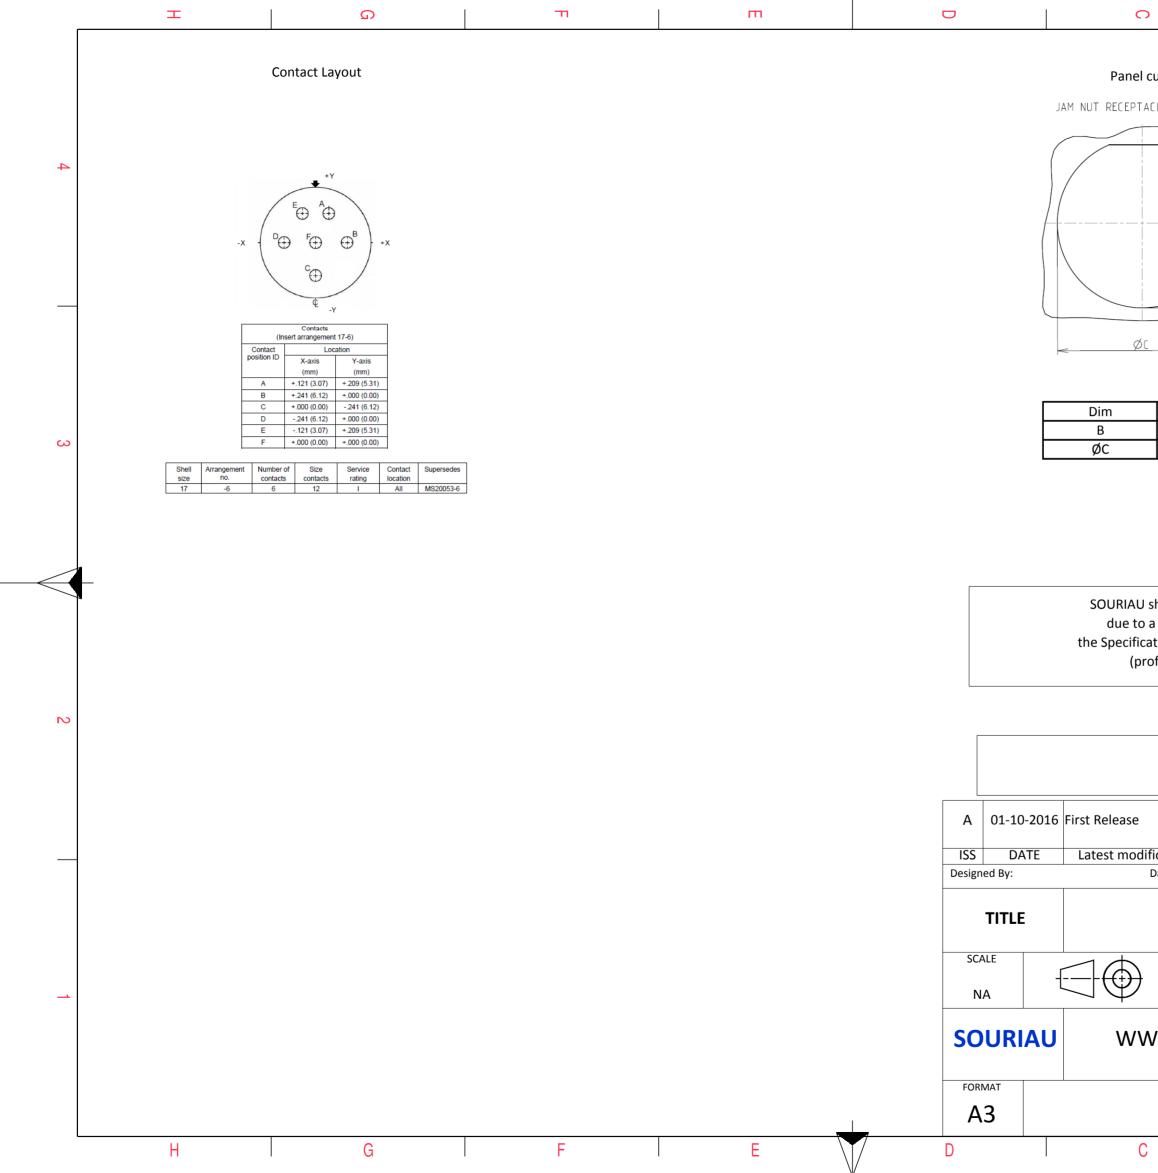

0		σ		А		
l cutou	t					
FACLE (T	YPE 7)					
					4	
1						
SC	>					
30	Nominal 0.73+0/-0.25					
	2.01+0.25/-0				3	
o a use cations	of the Products issued by either onal recommend	· ·	mply with by a third party		2	
Р	N: 8D71	7Z06AD				
					-	
dificatio Date:	on - by		CUSTOMER	MOD N°	+	
	Aluminiu	um Receptacl				
	General linea	r	NPRDS /	PROJECT		
}	Tolerances: ±		85	9	1	
This document is the property of SOURIAU it must not be reproduced or communicated without permission						
				SHEET	-	
		Z06AD-C		2/2		
С		В		Α		