



Electrical specifications

Center Frequency: 2017.5 MHz
Bandwidth: 15 MHz
Insertion loss (BW): 2.5 dB max
Ripple in BW: 0.5 dB max
VSWR in BW: 1.5:1
Attenuation 1: 30dB min@1950 MHz
Attenuation2: 30dB min@2100 MHz
In/Out Impedance: 50 Ohm
Input Power : 2 Watts


Mechanical

Mounting Method: SMT
Dimensions: 13 X 12 X 5.5 mm

Environmental

Operating Temperature: -20to +70° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

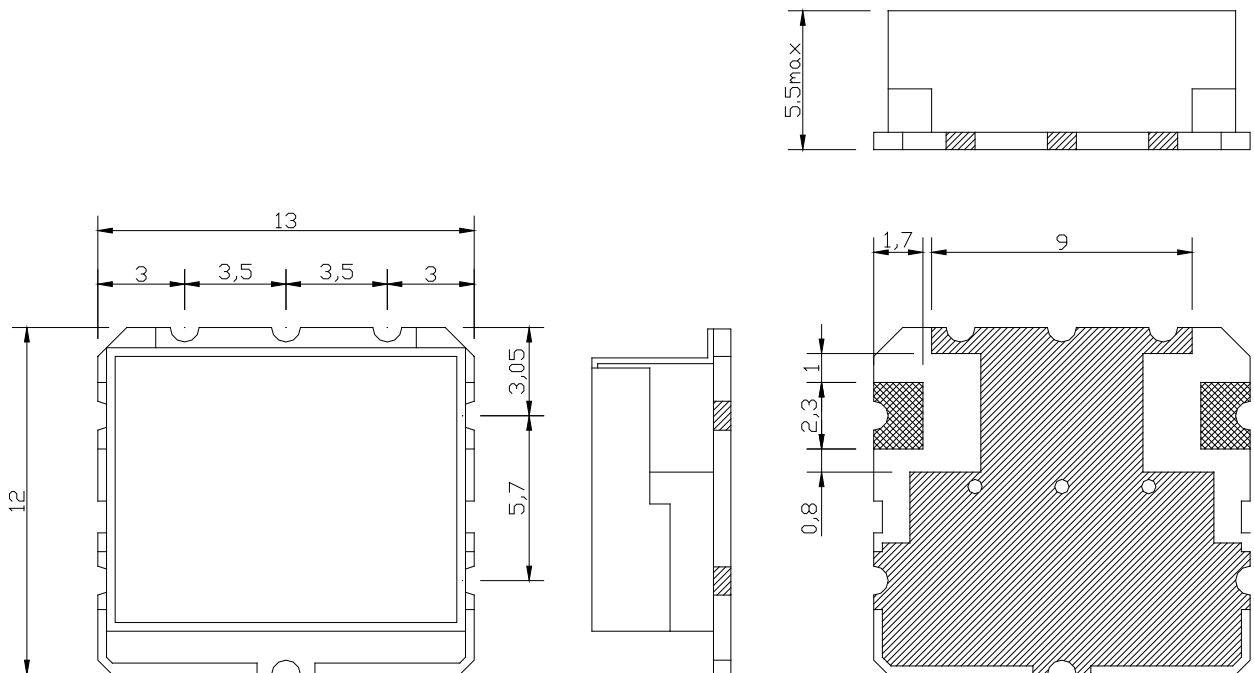

UNIT:mm
TOLERANCE:±0.3