


Specification Sheet

Part Number: 156-02613

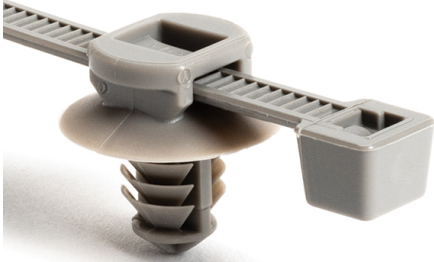

Friction tab inside the fir tree allows the tie to sit in mount without falling out prior to installation

Fir tree provides low insertion effort yet demonstrates high extraction resistance

Disc feature prevents rattling in high-vibration applications and protects against debris ingress

Article Number	156-02613
Type	T50RFT6ASET
Color	Gray (GY)
Quantity Per	carton
Product Description	HellermannTyton's fir tree mounts provide a secure grip in a mounting hole. The mount can slide along the cable tie to adjust orientation as needed. Fir tree mounts are designed to provide a low insertion force and high extraction force. This mount is sold unassembled with the cable tie.
Short Description	2-Piece Cable Tie/Fir Tree Mount, 8.0"L, .024"-.138" Panel Thickness", PA46, Gray, 5,000/ctn

Global Part Name T50RFT6ASET-PA46-GY

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225.0

Length L (Imperial) 8.0

Length L (Metric) 203.2

Fixation Method Fir Tree

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Variant Inside Serrated

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric) 50.0

Panel Thickness Min (Metric) 0.6

Panel Thickness Max (Metric) 3.5

Mounting Hole Diameter D (Imperial) 0.26

Mounting Hole Diameter D (Metric) 6.6 mm

Material Polyamide 4.6 (PA46)

Material Shortcut PA46

Operating Temperature -40°F to +266°F (-40°C to +130°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

Package Quantity (Imperial) 5000

Package Quantity (Metric) 5000

Customs Number 3926909988