



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

(1)





## NOTES:



MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	SW REFERENCE NO.: 627 COMBO ASSEMBLY			
COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3WK3622-3TA		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 627-3WK	3622-3TA	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



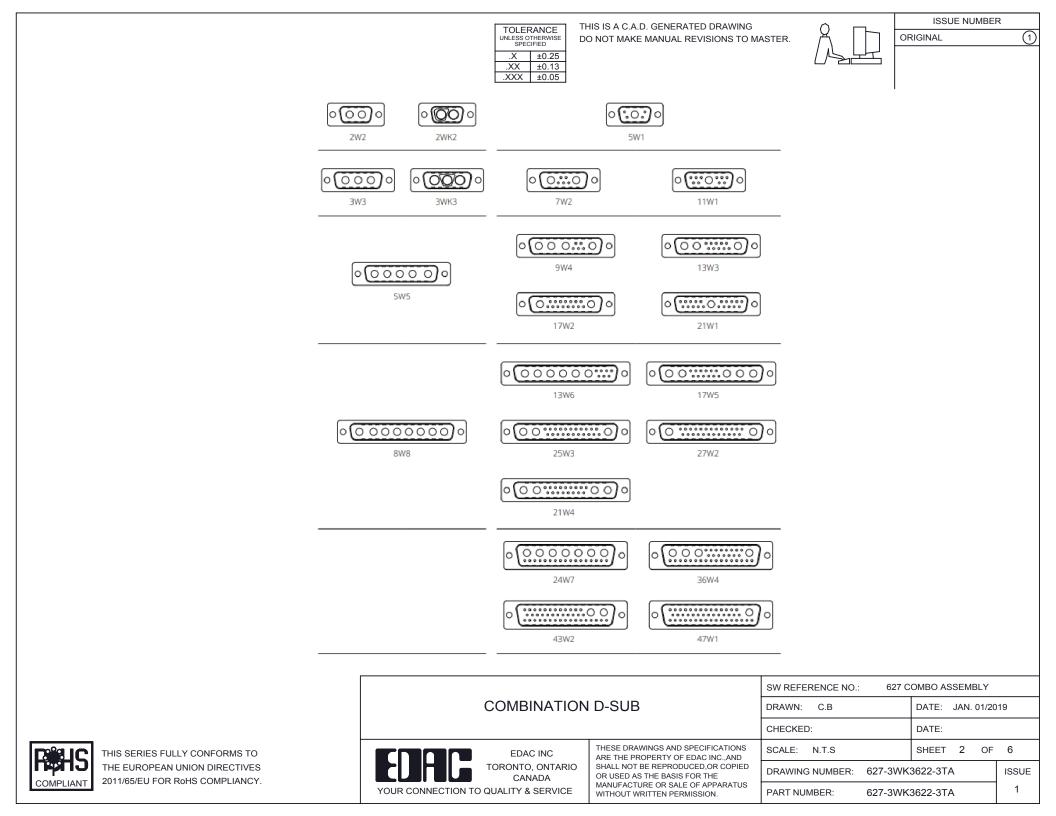

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



2W2 / 2WK2

3W3 / 3WK3



7W2 Male/Female





 $\overline{(1)}$ 

21W4 Male/Female



27W2 Male/Female



21W1 Male/Female


16.5

				SW REFERENCE NO.: 627 COMBO ASSEMBLY			
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/2019				
			DATE:				
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 3 OF	4			
	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3WK3622-3TA		ISSUE			
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 627-3WK	3622-3TA	1			

5W5 Male

5W5 Female

COMPLIANT



47.05

23.53

8W8 Male


8W8 Female

31.75


22.83




22.97




11W1 Male/Female



## 17W2 Male/Female



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



CURRENT RATING / ØA 10A / 2.2 20A / 3.3

> 30A / 3.7 40A / 4.2







 TOLERANCE
 THIS IS A C.A.D. GENERATED DRAWING

 UNLESS OTHERWISE
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25



25W3 Female

36W4 Female






25W3 Male








13W3 Male









30.50 15.62 15.24 15.24 15.24 15.24 15.24 15.24 15.24 15.24 15.24 15.24 15.24 15.24 15.72 15.24 15.24 15.72 15.24 15.24 15.72 15.24 15.24 15.72 15.72 15.74 15

13W6 Male



43W2 Male






17W5 Female

.XX ±0.13 .XXX ±0.05


9W4 Female

13W3 Female



43W2 Female

47W1 Female





17W5 Male


COMPLIANT











			SW REFERENCE NO.: 627 COMBO ASSEMBLY		
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 627-3WK3622-3TA		ISSUE
			PART NUMBER: 627-3WK	3622-3TA	1