

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	1

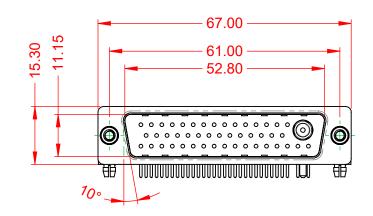




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05

				SW REFERENCE NO.: 629 COMBO ASSEMBLY				
		COMBINATION D-SUB		DRAWN: C.B		DATE: JAN. 01/2019		19
			CHECKED:		DATE:			
	EDAC INC TORONTO, ONTARIO CANADA	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE: (IN C	C.A.D. 1:1)	SHEET 1	OF	2
		TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-47W1640-1N5			ISSUE	
YOUR CO	YOUR CONNECTION TO Q		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER:	: 629-47W1	640-1N5		1

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

		£₽.
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	COLOR DE COL	

